

# S-5300-TRM, S5300TRMTC Shower Valve Trim **Specification Submittal**





#### **Feature Highlights Options/Modifications** Museo Shower Valve Trim □ -LP Loop handle Requires Temptrol® Pressure Balancing Shower Valve Integral volume control Metal lever handle -REB Rebuild trim kit, includes TA-10 and TA-4 Showerhead not included -VP Vandal resistant escutcheon screws in place of Tub spout not included standard screws Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish □ -BLK Polished Graphite finish Available with TA-10 flow control spindle and T-12A cap assembly

□ -STN

Note: Append appropriate -suffix to model number.

Satin Nickel finish

#### **Model Numbers**

(order p/n S5300TRMTC)

☐ S-5300-TRM

Shower Valve Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately

for Temptrol valve bodies installed with Test Cap

□ S5300TRMTC

Shower Valve Trim with integral volume control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

## Compliance

ASME A112.18.1/CSA B125.1




## Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**5 Years** - for industrial/commercial installations.

Refer to www.symmons.com/warranty for complete warranty information. Go to www.symmons.com/register to register your Symmons product.

## **Dimensions**

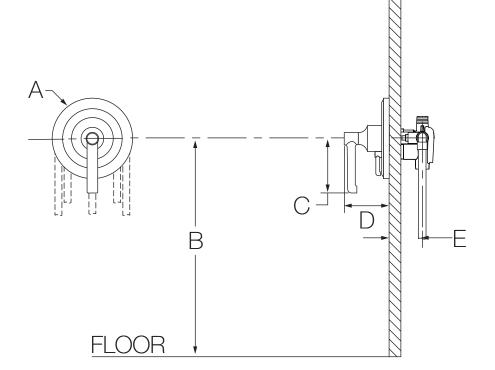

Measurements	
Α	Ø 6-1/4", 159 mm
В	Ref. 42", 1067 mm
С	3-1/4", 83 mm
D	3-3/4", 95 mm
Е	Rough-in 2-3/8" $\pm$ 1/2", 60 mm $\pm$ 13 mm

#### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see E as reference).
- 4) Dimensions subject to change without notice.