



Location:

SYMMONS® DS Creations

the smart choice™


SLW-7702-1.5 (CDS0250-274-0-CYL)
Two Handle Widespread Lavatory Faucet
Specification Submittal



Model Numbers	Specification
<input type="checkbox"/> SLW-7702-1.5 <i>Two Handle Widespread Lavatory Faucet</i>	Two Handle Widespread Lavatory Faucet featuring 8"-16" mounting configuration shall include ceramic cartridges, copper supply lines, 1/2" IPS inlet connections and 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.
Modifications <input type="checkbox"/> -1.0  1.0 gpm (3.8 L/min) flow restrictor Note: Append appropriate -suffix to model number.	
Warranty	
Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.	



Dimensions

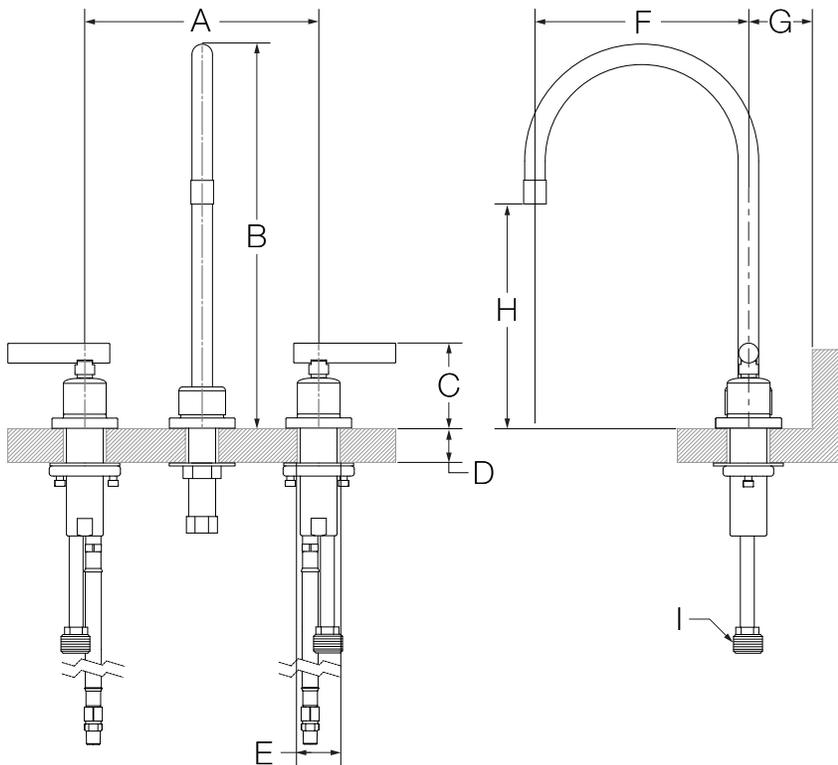

Measurements	
A	8", 203 mm
B	11-5/8", 295 mm
C	2-5/8", 67 mm
D	Deck Thickness Ref. Max. 1-1/4", 32 mm
E	Hole Size Max. Ø 1-1/2", 38 mm
F	6-1/2", 165 mm
G	To Backsplash Min. 2-1/2", 64 mm
H	6-3/4", 171 mm
I	1/2-14 NPSM

Note: Dimensions subject to change without notice.



Emplacement:

SLW-7702-1.5 (CDS0250-274-0-CYL)
 Robinet de salle de bain à deux poignées et à trois trous




Présentation des spécifications

Numéro de modèle	Spécification
<input type="checkbox"/> SLW-7702-1.5 <i>Robinet de salle de bain à deux poignées et à trois trous</i>	Le robinet de salle de bain à deux poignées et à trois trous présente une configuration de fixation de 8 à 16 po et comprend des cartouches en céramique, des conduites d'alimentation en cuivre de 3/8 po, des conduits d'alimentation en eau IPS de 1/2 po, un ensemble pour drain 50/50 et un aérateur standard de 1,5 gpm (5,7 L/min). Composants faits de laiton et de matériaux non métalliques au fini chrome poli standard.
Modifications	
<input type="checkbox"/> -1.0  Réducteur de débit de 1,0 gpm (3,8 L/min) Remarque : Juxtaposer le -suffixe approprié au numéro de modèle.	
Garantie À vie limitée - à l'acheteur original dans les installations du consommateur ou résidentielles. 5 ans - pour des installations commerciales et industrielles. Se reporter au site www.symmons.com/warranty (en anglais) pour l'information complète concernant la garantie.	



Dimensions

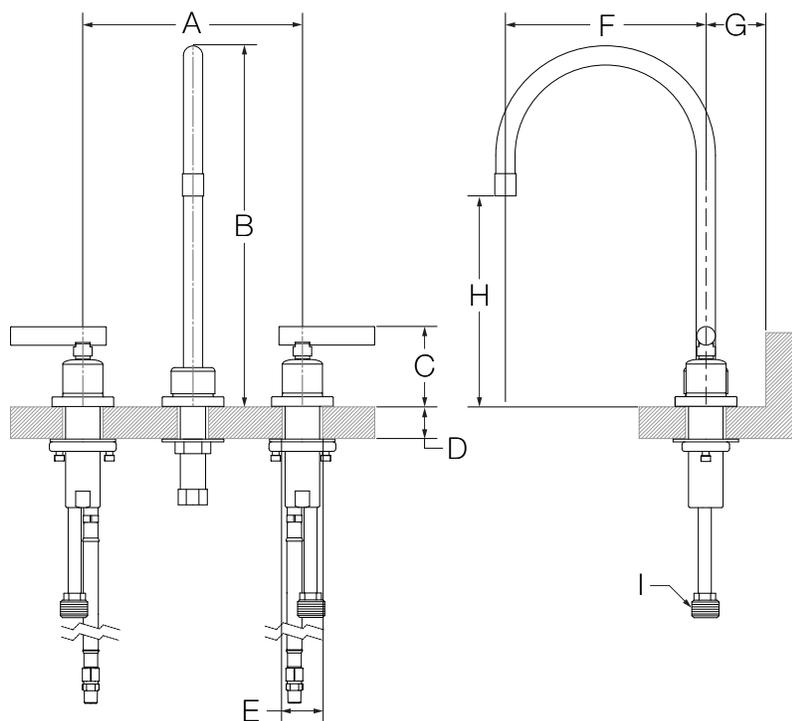

Mesures	
A	8 po, 203 mm
B	11-5/8 po, 295 mm
C	2-5/8 po, 67 mm
D	Épaisseur du comptoir Max. 1-1/4 po, 32 mm
E	Taille du trou Max. Ø 1-1/2 po, 38 mm
F	6-1/2 po, 165 mm
G	Min. 2-1/2 po, 64 mm
H	6-3/4 po, 171 mm
I	1/2-14 NPSM

Remarque: Les dimensions sont sujettes à changer sans préavis.