


Location:



SYMMONS®

SPR-3510-PD
Spring Kitchen Faucet with Pull-Down Wand
Specification Submittal

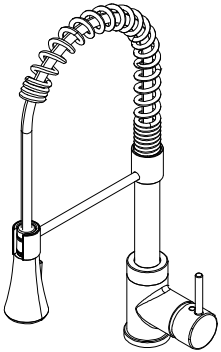

Model Numbers

- ☐ **SPR-3510-PD-1.5**
Spring Kitchen Faucet with Pull-Down Wand

Compliance

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372



Specification

Spring Kitchen Faucet with Pull-Down Wand shall include single hole mount configuration, dual function stream to spray wand (faucet will default to stream mode), ceramic cartridge, braided hose connections and standard 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Modifications


- ☐ **-STS** Stainless Steel finish
☐ **-MB** Matte Black finish

Note: Append appropriate -suffix to model number.

Architectural/ Engineering Specification

Symmons Spring Kitchen Faucet with Pull-Down Wand_____ with Spring Kitchen Faucet with Pull-Down Wand shall include single hole mount configuration, dual function stream to spray wand (faucet will default to stream mode), ceramic cartridge, braided hose connections and standard 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, complaint. Available options include: "-STS - Stainless Steel finish", "-MB - Matte Black finish".

Dimensions

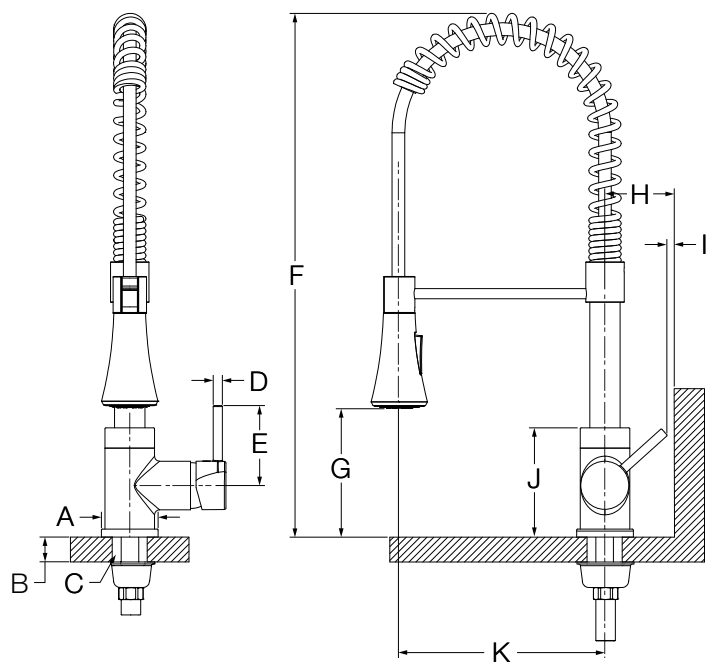

Measurements	
A	Ø 2-3/16", 56 mm
B	Deck Thickness Ref. Max. 1-1/2", 38 mm
C	Hole Size Min. Ø 1-3/4", 44 mm Max. Ø 1-7/8", 48 mm
D	Ø 3/8", 10 mm
E	3-1/8", 79 mm
F	20-3/8", 518 mm
G	5-1/8", 130 mm
H	Min. 3-1/8", 79 mm
I	3/4", 19 mm
J	4-1/4", 108 mm
K	8-1/16", 205 mm

Notes:

- 1) Hoses removed for clarity.
- 2) Dimensions subject to change without notice.