







SPR3510PD
Spring Kitchen Faucet with Pull-Down Wand
Specification Submittal

Location:

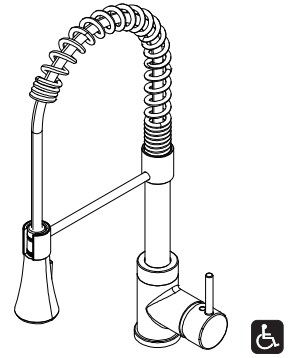


Model Numbers	Specification
<div><input type="checkbox"/> SPR3510PD Spring Kitchen Faucet with Pull-Down Wand</div>	Spring Kitchen Faucet with Pull-Down Wand shall include single hole mount configuration, dual function stream to spray wand (faucet will default to stream mode), ceramic cartridge, braided hose connections and standard 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.
<div>Compliance<ul style="list-style-type: none">• ASME A112.18.1/CSA B125.1.• NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372.• Lever handle meets ADA requirements.<div></div></div>	
Warranty	Modifications
<div><div>Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</div><div></div></div>	<div><div><input type="checkbox"/> STSStainless Steel finish</div><div><input type="checkbox"/> MBMatte Black finish</div></div> <div>Note: Append appropriate suffix to model number.</div>

Architectural/Engineering Specification

Symmons Spring Kitchen Faucet with Pull-Down Wand _____ Features include single hole mount configuration, dual function stream to spray wand (faucet will default to stream mode), ceramic cartridge, braided hose connections and standard 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, complaint. Lever handle meets ADA requirements. Available options include: STS = Stainless Steel finish, MB = Matte Black finish.

Dimensions

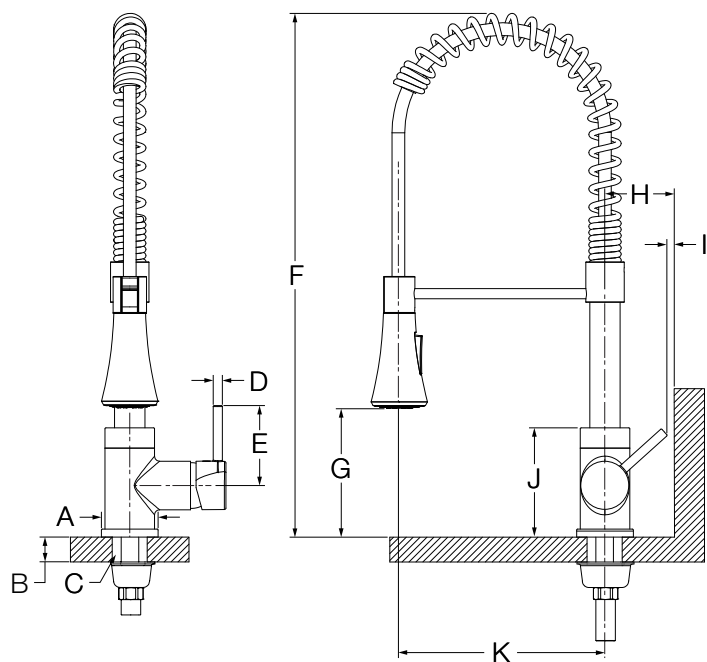

Measurements	
A	Ø 2-3/16", 56 mm
B	Deck Thickness Ref. Max. 1-1/2", 38 mm
C	Hole Size Min. Ø 1-3/4", 44 mm Max. Ø 1-7/8", 48 mm
D	Ø 3/8", 10 mm
E	3-1/8", 79 mm
F	20-3/8", 518 mm
G	5-1/8", 130 mm
H	Min. 3-1/8", 79 mm
I	3/4", 19 mm
J	4-1/4", 108 mm
K	8-1/16", 205 mm

Notes:

- 1) Hoses removed for clarity.
- 2) Dimensions subject to change without notice.