


SRT-0600-70-TRM (CDSRT0600-70-TRM)
Two Handle Roman Tub Faucet
Installation Guide





Model Numbers	Specification
□ SRT-0600-70-TRM Two Handle Roman Tub Faucet □ SRT-0600-70-BODY Roman Tub Valve Body Assembly	Two Handle Roman Tub Faucet (with roman tub valve body assembly) shall include quarter turn ceramic cartridges and 1/2" IPS inlet connections. Roman Tub Faucet shall be made from metal construction, plated in standard polished chrome finish.
Warranty	
Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.	


Dimensions

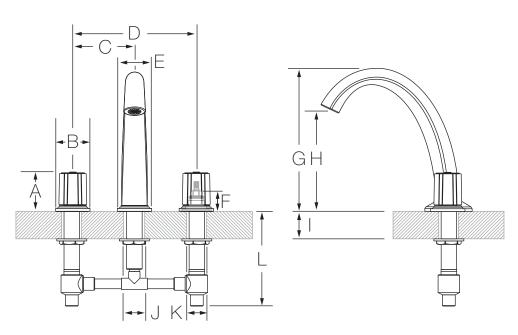

Measurements		
Α	(2x) 2-1/2", 64 mm	
В	Ø 2-1/4", 57 mm	
С	4", 102 mm	
D	8", 203 mm	
Е	E Ø 2-1/4", 57 mm	
F	1-5/16", 33 mm	
G	9-1/16", 230 mm	
Н	6-1/2", 165 mm	
_	Deck Thickness Ref.	
'	Max. 3-1/2", 89 mm	
J	Hole Size	
	Ø 1-3/8", 35 mm	
	(2x) Hole Size	
K	Min. Ø 1-1/4", 32 mm	
	Max. Ø 1-1/2", 38 mm	
L	Ø 6-1/16", 154 mm	

Note: Dimensions subject to change without notice.

Parts Breakdown

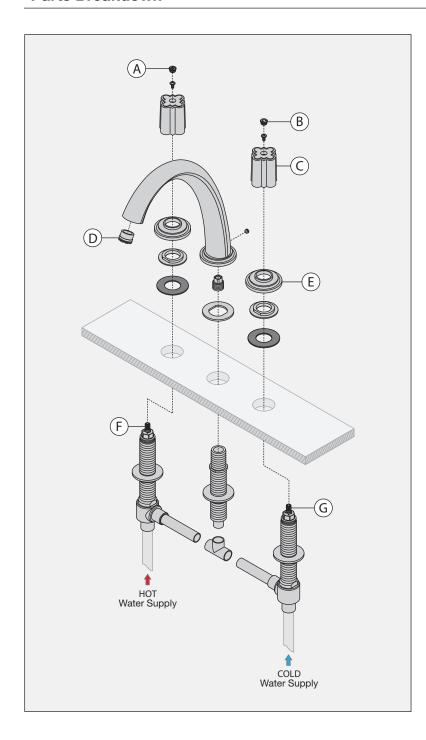

Replacement Parts			
Item	Description	Part Number	
Α	Hot Plug Button	RL-310	
В	Cold Plug Button	NL-310	
С	Handle	RL-311	
D	Aerator	RT-262	
E	Handle Escutcheon	RL-312	
F	Hot Cartridge	KN-114	
G	Cold Cartridge	KN-113	

Tools Required for Installation		
Adjustable Wrench		
Allen Wrench: Spout (3 mm)		
Phillips Head Screwdriver		
Plumber Tape		
Safety Glasses		
Silicone		
Solder and Torch		

Notes:

- 1) Apply a bead of silicone around the perimeter of trim installed flush to sink.
- 2) Apply plumber tape to all threaded connections.

▲ WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.