

The logo for Symmons Canterbury. It features a stylized icon of a shower head with multiple spray nozzles in the top left corner. To the right of the icon, the word "SYMMONS" is written in a bold, green, sans-serif font, followed by a registered trademark symbol (®). To the right of "SYMMONS", the word "Canterbury" is written in a black, sans-serif font, also followed by a registered trademark symbol (®).

- **Limited Lifetime** - to the original end purchaser in consumer installations.
- **5 years** - for commercial installations

3-1/8" (80 mm)

4" (102 mm)

2-1/16" (52 mm) dia.

3-13/16" (96 mm)

Finished deck thickness 1-3/8" (35 mm) max.

1" dia. (25 mm)

Hole size 1-1/16" (27 mm) min. 1-1/2" (38 mm) max.

8" (203 mm) min.

18-1/4" (464 mm) max. with Simmons supplied copper tubing

Connect using 1/2" copper tubing

10-11/16" (272 mm)

1-15/16" (48 mm)


3" (76 mm)

3-1/4" (83 mm)

3-15/16" (101 mm)

8-9/16" (218 mm)

Dimensions

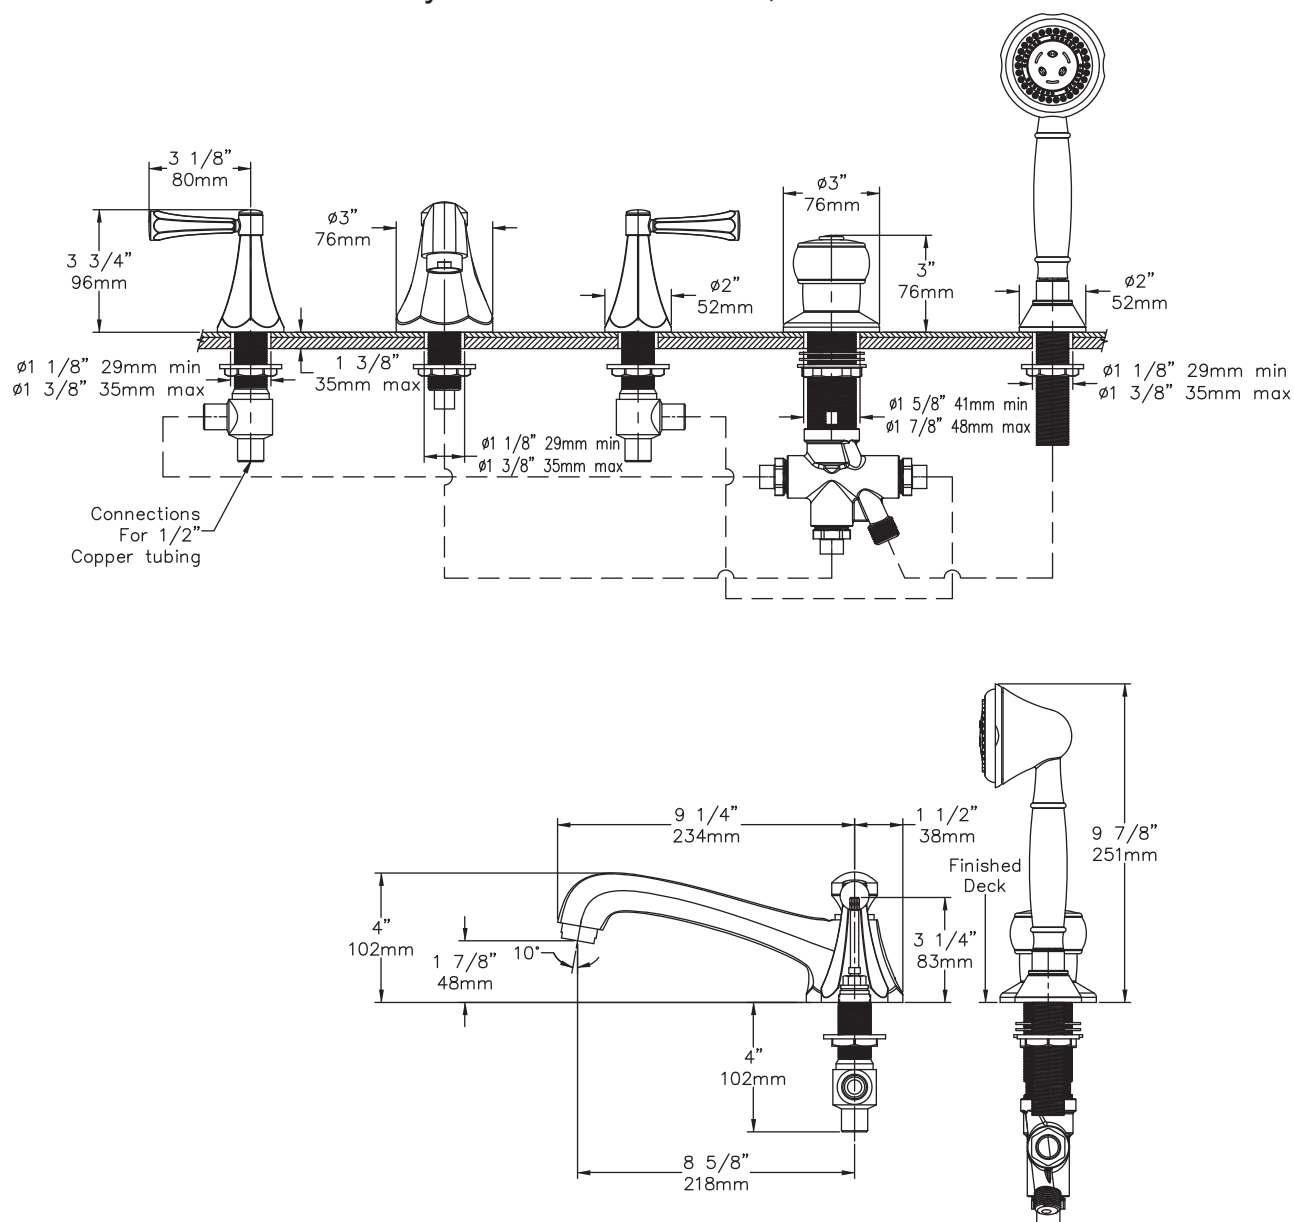

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
Phone: (800) 796-6667 ■ Fax: (800) 961-9621
Website: symmons.com ■ Email: gethelp@symmons.com

Copyright © 2019 Symmons Industries, Inc. ■ ZV-678 REV C ■ 091919

