

Location:



SLS139812PP  
Single Handle Lavatory Faucet  
**Specification Submittal**



**Model Numbers**

- ☐ **SLS139812PP** Single Handle Lavatory Faucet with Push Pop Drain Assembly

**Feature Highlights**

- Single lever cartridge with ceramic control components
- Braided supply hoses with 3/8" compression fittings
- 1.0 gpm (3.8 L/min) standard flow rate
- Single Handle Lavatory Faucet shall be metal construction
- Plated in standard Polished Chrome finish

**Compliance**

-ASME A112.18.1/CSA B125.1

-NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


**Warranty**

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



**Dimensions**

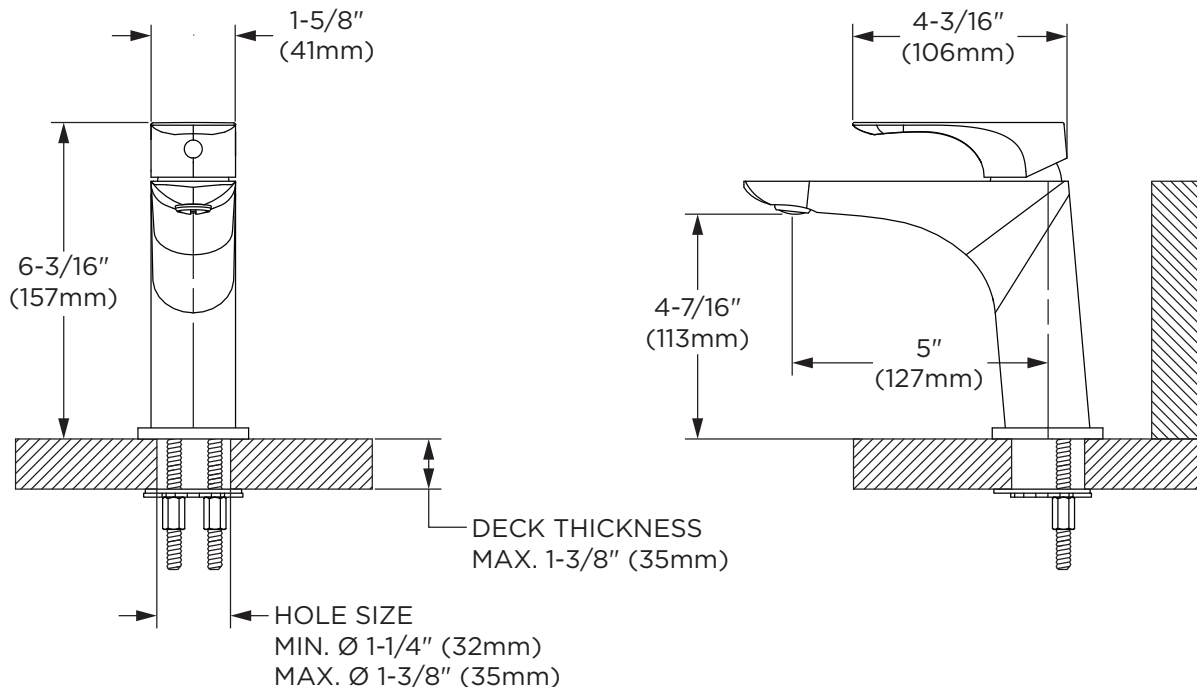

**Notes:**

- 1) Dimensions subject to change without notice
- 2) Hoses removed for clarity



## Visual Install Guide

Push Pop Install: Insert drain body (L) into drain opening. From below, Tighten locking nut (O) with gasket (M) and washer (N) to flange. Tighten tail nut (Y) with washer (X) to secure tail pipe (Q). Do Not overtighten.

