







SYMMONS®

Location:

Origins®



S-9606-PLR, S-9606-PLR-TRM, S9606PLR, S9606PLRTRM Tub/Shower/Hand Shower System or Trim Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none">Origins Tub/Shower/Hand Shower System or TrimRequires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9606-PLR)Requires Symmons Dual Outlet Diverter Valve to divert showerhead from hand shower wand (included with S-9606-PLR)Adjustable stop screw to limit handle turn (included with S-9606-PLR)Integral diverter control to divert to tub spoutMetal lever handlesADA 36" grab bar for hand showerDual checks for backflow protection60" flexible metal hoseADA 1 mode hand shower with non-positive shut-off1 mode showerhead with easy to clean nozzles5-1/4" non-diverter tub spoutComponents shall be metal and nonmetallic construction, plated in standard Polished Chrome finishAvailable with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9606PLRTRMTC)For optional in-line vacuum breaker order p/n EF-109	<div><div><div><div><input type="checkbox"/></div><div>-1.5</div><div></div></div><div>1.5 gpm (5.7 L/min) flow restrictor</div></div><div><div><div><div><input type="checkbox"/></div><div>L1</div><div></div></div><div>Less showerhead</div></div><div><div><div><div><input type="checkbox"/></div><div>L2</div><div></div></div><div>Less hand shower (wand only)</div></div><div><div><div><div><input type="checkbox"/></div><div>L3</div><div></div></div><div>Less showerhead & hand shower wand</div></div><div><div><div><div><input type="checkbox"/></div><div>L4</div><div></div></div><div>Less head, arm & flange</div></div><div><div><div><div><input type="checkbox"/></div><div>L6</div><div></div></div><div>Less tub spout</div></div><div><div><div><div><input type="checkbox"/></div><div>L7</div><div></div></div><div>Less handle</div></div><div><div><div><div><input type="checkbox"/></div><div>TC</div><div></div></div><div>Test Cap Trim</div></div><div><div><div><div><input type="checkbox"/></div><div>-CHKS</div><div></div></div><div>Integral check stops</div></div><div><div><div><div><input type="checkbox"/></div><div>-STN</div><div></div></div><div>Satin Nickel finish</div></div><div><div><div><div><input type="checkbox"/></div><div>-B</div><div></div></div><div>Brass escutcheon (chrome only)</div></div><div><div><div><div><input type="checkbox"/></div><div>-X</div><div></div></div><div>Integral service stops - allows water shut-off at valve for service</div></div></div></div></div></div></div></div></div></div></div></div></div></div>
Model Numbers	Compliance
<div><div><div><div><input type="checkbox"/></div><div>S-9606-PLR</div><div>Tub/Shower/Hand Shower System with integral volume control & Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)</div></div><div><div><div><div><input type="checkbox"/></div><div>S9606PLR</div><div>Tub/Shower/Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 modifications, do not use hyphens or decimal points)</div></div><div><div><div><div><input type="checkbox"/></div><div>S-9606-PLR-TRM</div><div>Tub/Shower/Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)</div></div><div><div><div><div><input type="checkbox"/></div><div>S9606PLRTRM</div><div>Tub/Shower/Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)</div></div></div></div></div></div></div></div></div></div>	<div><div><div><div><ul style="list-style-type: none">ASME A112.18.1/CSA B125.1Buy American Act (S-9606-PLR only)WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)</div><div><div><div><div></div><div>CUS</div></div><div><div><div></div><div>WaterSense EPA Certified by CSA Group</div></div></div></div></div></div></div></div>
Warranty	<div><div><div><div><div><div>Limited Lifetime</div><div>- to the original end purchaser in consumer/residential installations.</div></div><div><div>10 Years</div><div>- for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</div></div></div><div></div></div></div></div>


Architectural/ Engineering Specification

Symmons Origins _____ With Origins Tub/Shower/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9606-PLR), Requires Symmons Dual Outlet Diverter Valve to divert showerhead from hand shower wand (included with S-9606-PLR), Adjustable stop screw to limit handle turn (included with S-9606-PLR), Integral diverter control to divert to tub spout, Metal lever handles, ADA 36" grab bar for hand shower, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower with non-positive shut-off, 1 mode showerhead with easy to clean nozzles, 5-1/4" non-diverter tub spout, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9606PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower (wand only)", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm & flange", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stops", and "TC - Test Cap Trim".

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184 ■ Phone: (800) 796-6667 ■ Fax: (800) 961-9621

Copyright © 2022 Symmons Industries, Inc. ■ symmons.com ■ gethelp@symmons.com ■ ZV-1321 REV E ■ 120222

Dimensions

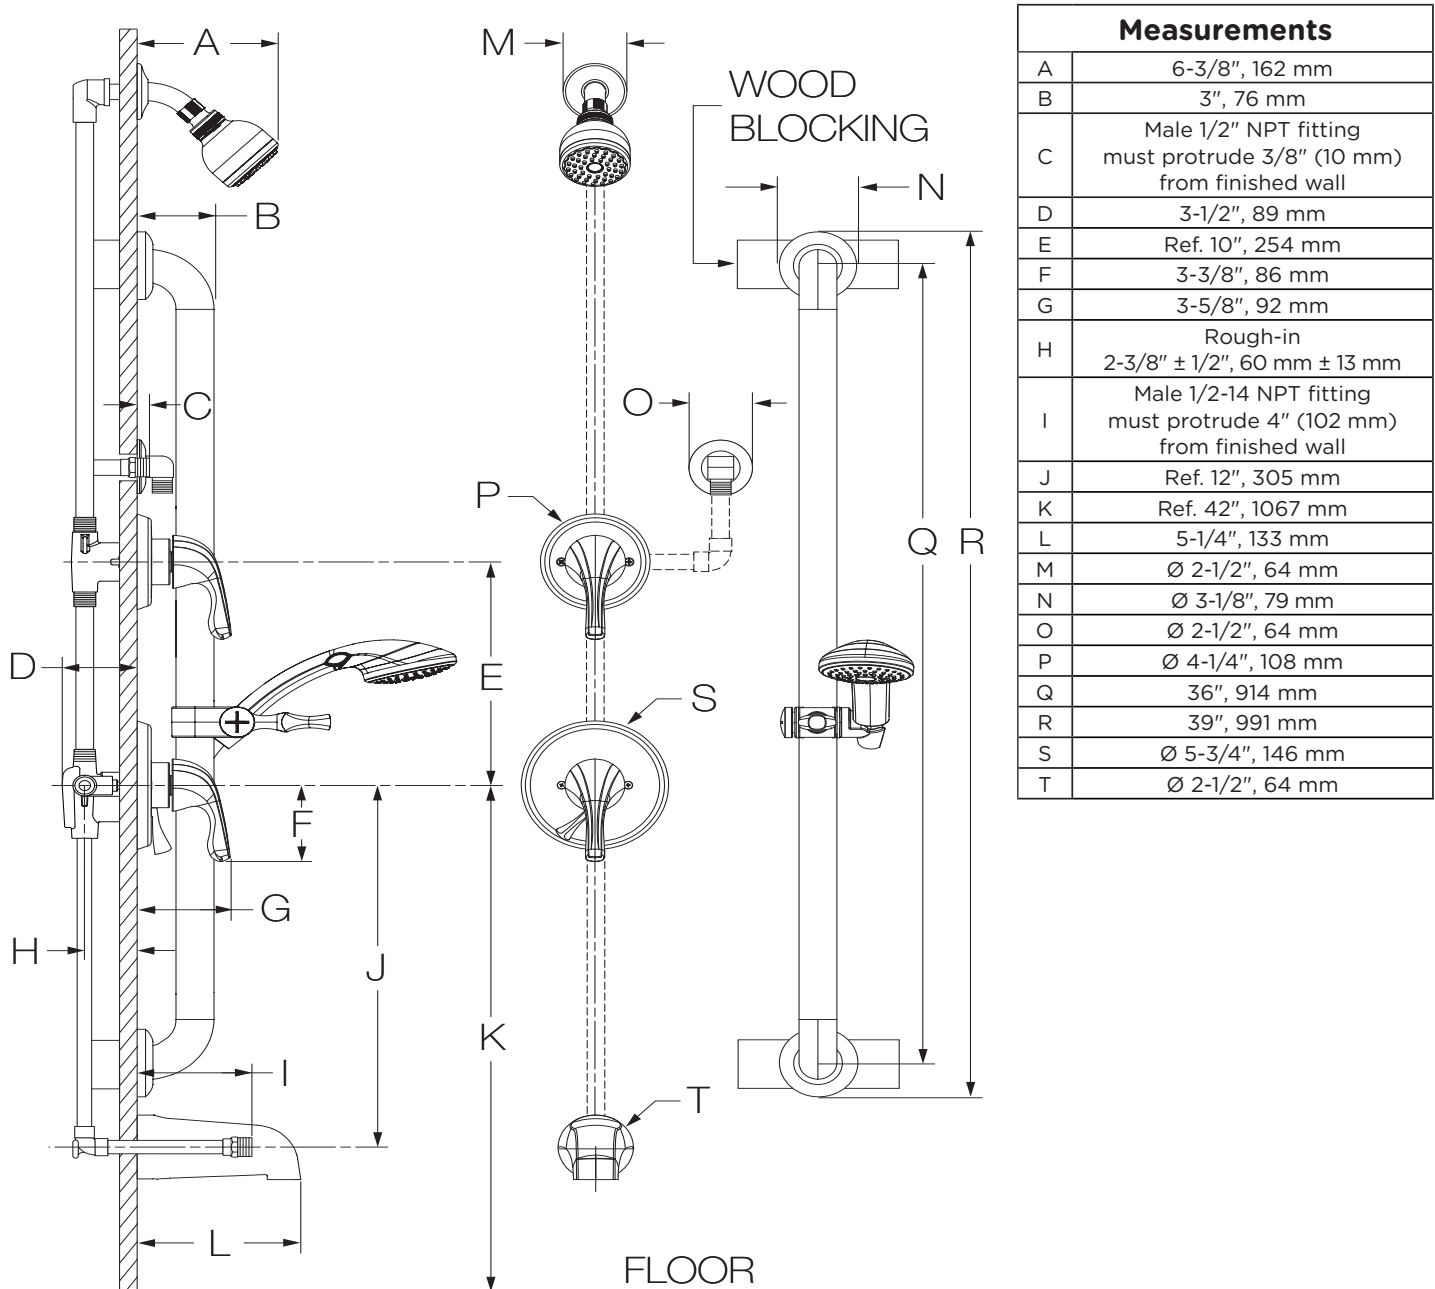

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see H as reference).
- 4) Dimensions subject to change without notice.