

Location:



SYMMONS® Origins®



S-9606-PLR, S-9606-PLR-TRM, S9606PLR, S9606PLRTRM Tub/Shower/Hand Shower System or Trim Specification Submittal

Feature Highlights

- Origins Tub/Shower/Hand Shower System or Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9606-PLR)
- Requires Symmons Dual Outlet Diverter Valve to divert showerhead from hand shower wand (included with S-9606-PLR)
- Adjustable stop screw to limit handle turn (included with S-9606-PLR)
- Integral diverter control to divert to tub spout
- Metal lever handles
- ADA 36" grab bar for hand shower
- Dual checks for backflow protection
- 60" flexible metal hose
- ADA 1 mode hand shower with non-positive shut-off
- 1 mode showerhead with easy to clean nozzles
- 5-1/4" non-diverter tub spout
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9606PLRTRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Options/Modifications

- 1.5** 1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- L2** Less hand shower (wand only)
- L3** Less showerhead & hand shower wand
- L4** Less head, arm & flange
- L6** Less tub spout
- L7** Less handle
- TC** Test Cap Trim
- CHKS** Integral check stops
- STN** Satin Nickel finish
- B** Brass escutcheon (chrome only)
- X** Integral service stops - allows water shut-off at valve for service

Model Numbers

- S-9606-PLR**
Tub/Shower/Hand Shower System with integral volume control & Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- S9606PLR**
Tub/Shower/Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- S-9606-PLR-TRM**
Tub/Shower/Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- S9606PLRTRM**
Tub/Shower/Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

Note:

-To create trim sku, follow the format:
Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (if lower than standard) -> TRM -> TC (if applicable)
-To create valve & trim sku, follow the format:
Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (if lower than standard)
-For B and REV modifications, contact customer service for your sku

Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (S-9606-PLR only)
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)



Warranty


Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Origins _____ With Origins Tub/Shower/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9606-PLR), Requires Symmons Dual Outlet Diverter Valve to divert showerhead from hand shower wand (included with S-9606-PLR), Adjustable stop screw to limit handle turn (included with S-9606-PLR), Integral diverter control to divert to tub spout, Metal lever handles, ADA 36" grab bar for hand shower, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower with non-positive shut-off, 1 mode showerhead with easy to clean nozzles, 5-1/4" non-diverter tub spout, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9606PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower (wand only)", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm & flange", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stops", and "TC - Test Cap Trim".

Dimensions

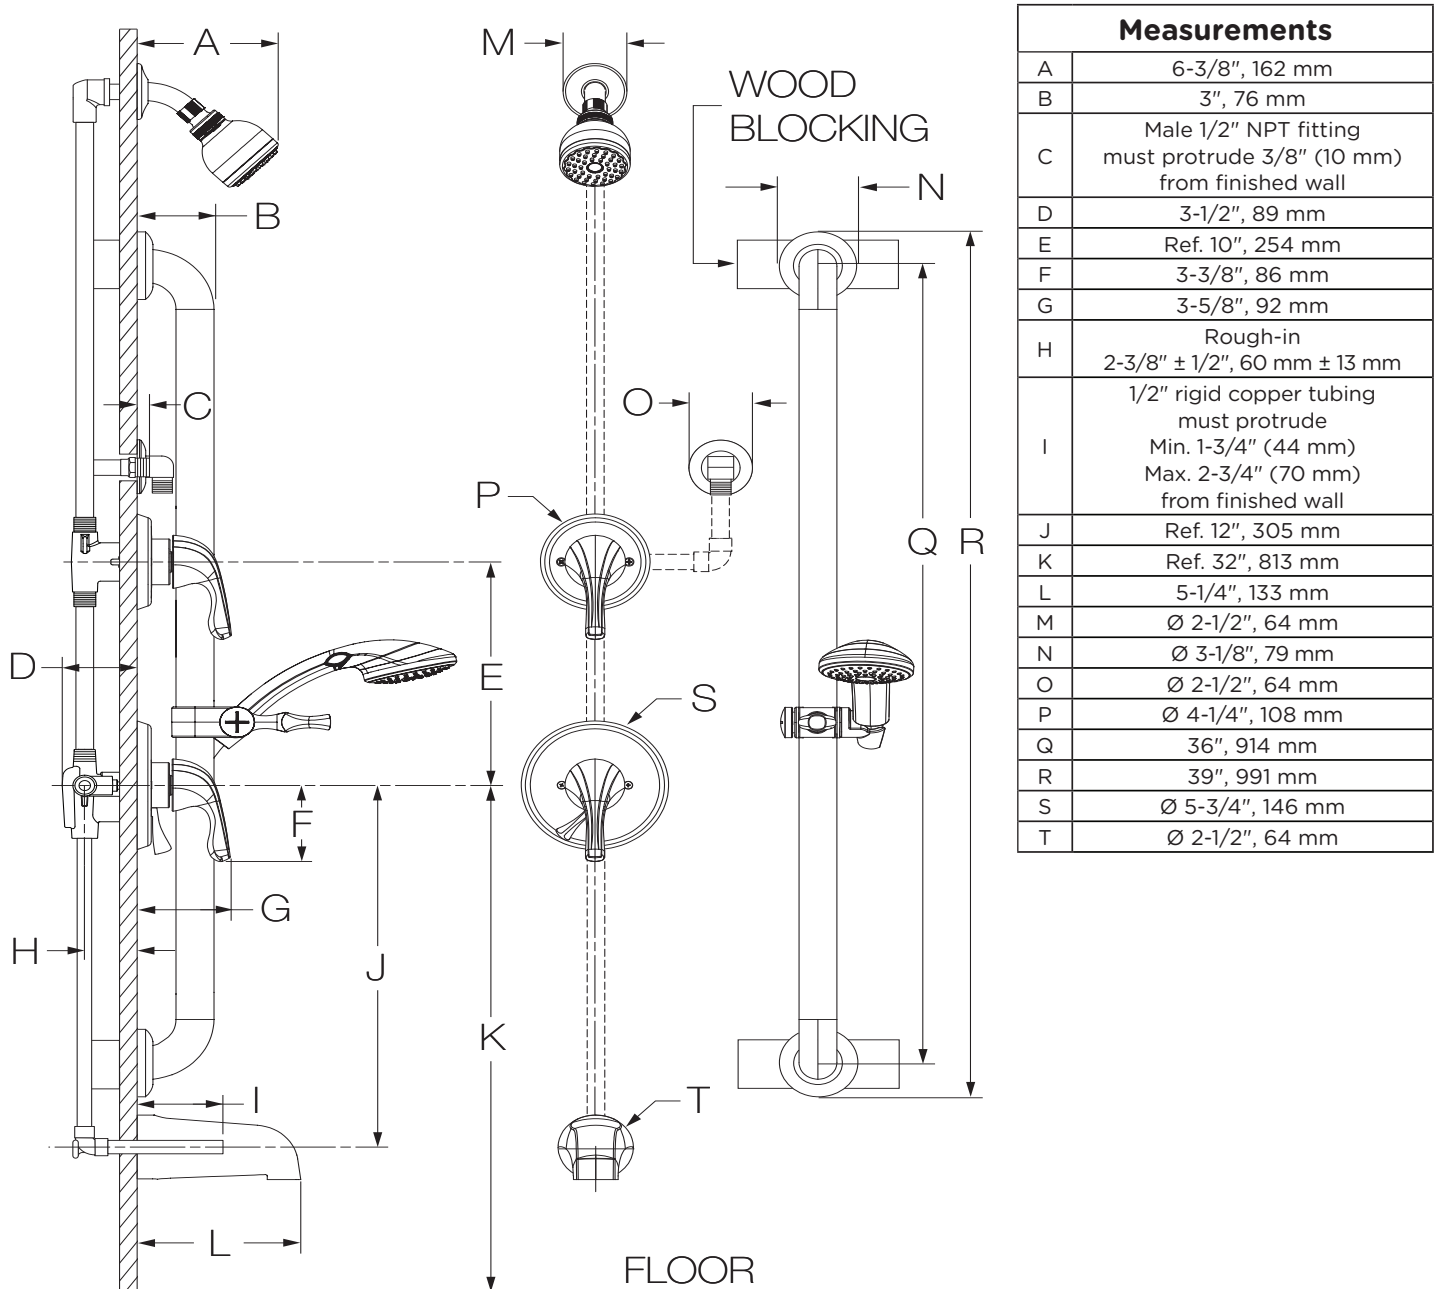

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see H as reference).
- 4) Dimensions subject to change without notice.