




SYMMONS® Elm®



5596TRM
Tub/Hand Shower/Shower Trim
Specification Submittal

Location:

Model Numbers

- ☐ **5596TRM**
Tub/Hand Shower/Shower Trim

Valve Options

- 261 Series Temptrol® Shower Valve with TRM modifier
- 161 Series Temptrol Shower Valve requires TC modifiers
- 3DIVBODYSRT

Feature Highlights

- Elm Tub/Shower/Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- Separate three-function diverter body.
- 5-7/8" tub spout.
- 60" flexible metal hose.
- 7-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO).
- 7-mode HydroMersion showerhead with Non-Positive Shutoff (NPSO).
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components made from metal and nonmetal materials plated in standard Polished Chrome finish.

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



Modifications

- ☐ **15** **CG** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **TC** Test Cap Trim (includes TA-10™ & T-12A) *used with 161 Series Temptrol Valve.*
- ☐ **L1** Less showerhead
- ☐ **L2** Less hand shower (wand only)
- ☐ **L3** Less showerhead and hand shower (head and wand only)
- ☐ **L4** Less showerhead, shower arm, and flange
- ☐ **L5** Less hand shower system (less bar/cradle, hose, wand, and elbow).
- ☐ **L7** Less handle
- ☐ **BBZ** Brushed Bronze finish
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle and hand shower wand meet ADA requirements for operation



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
5596	STN		15	TRM		5596STN15TRM
5596	MB	L3		TRM	TC	5596MBL3TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Elm Tub and Shower and Hand Shower System _____ Includes Elm Tub/Shower/Hand Shower Trim for the Temptrol® Pressure-Balancing Shower Valve. Features 5-7/8" tub spout, 60" flexible metal hose, 7-mode HydroMersion hand shower with NPSO, 7-mode HydroMersion showerhead with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. Lever handle and hand shower wand meet ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower (wand only), L3 = Less showerhead and hand shower (head and wand only), L4 = Less shower arm and flange, L5 = Less hand shower system, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, and TC = Test Cap Trim.

Dimensions

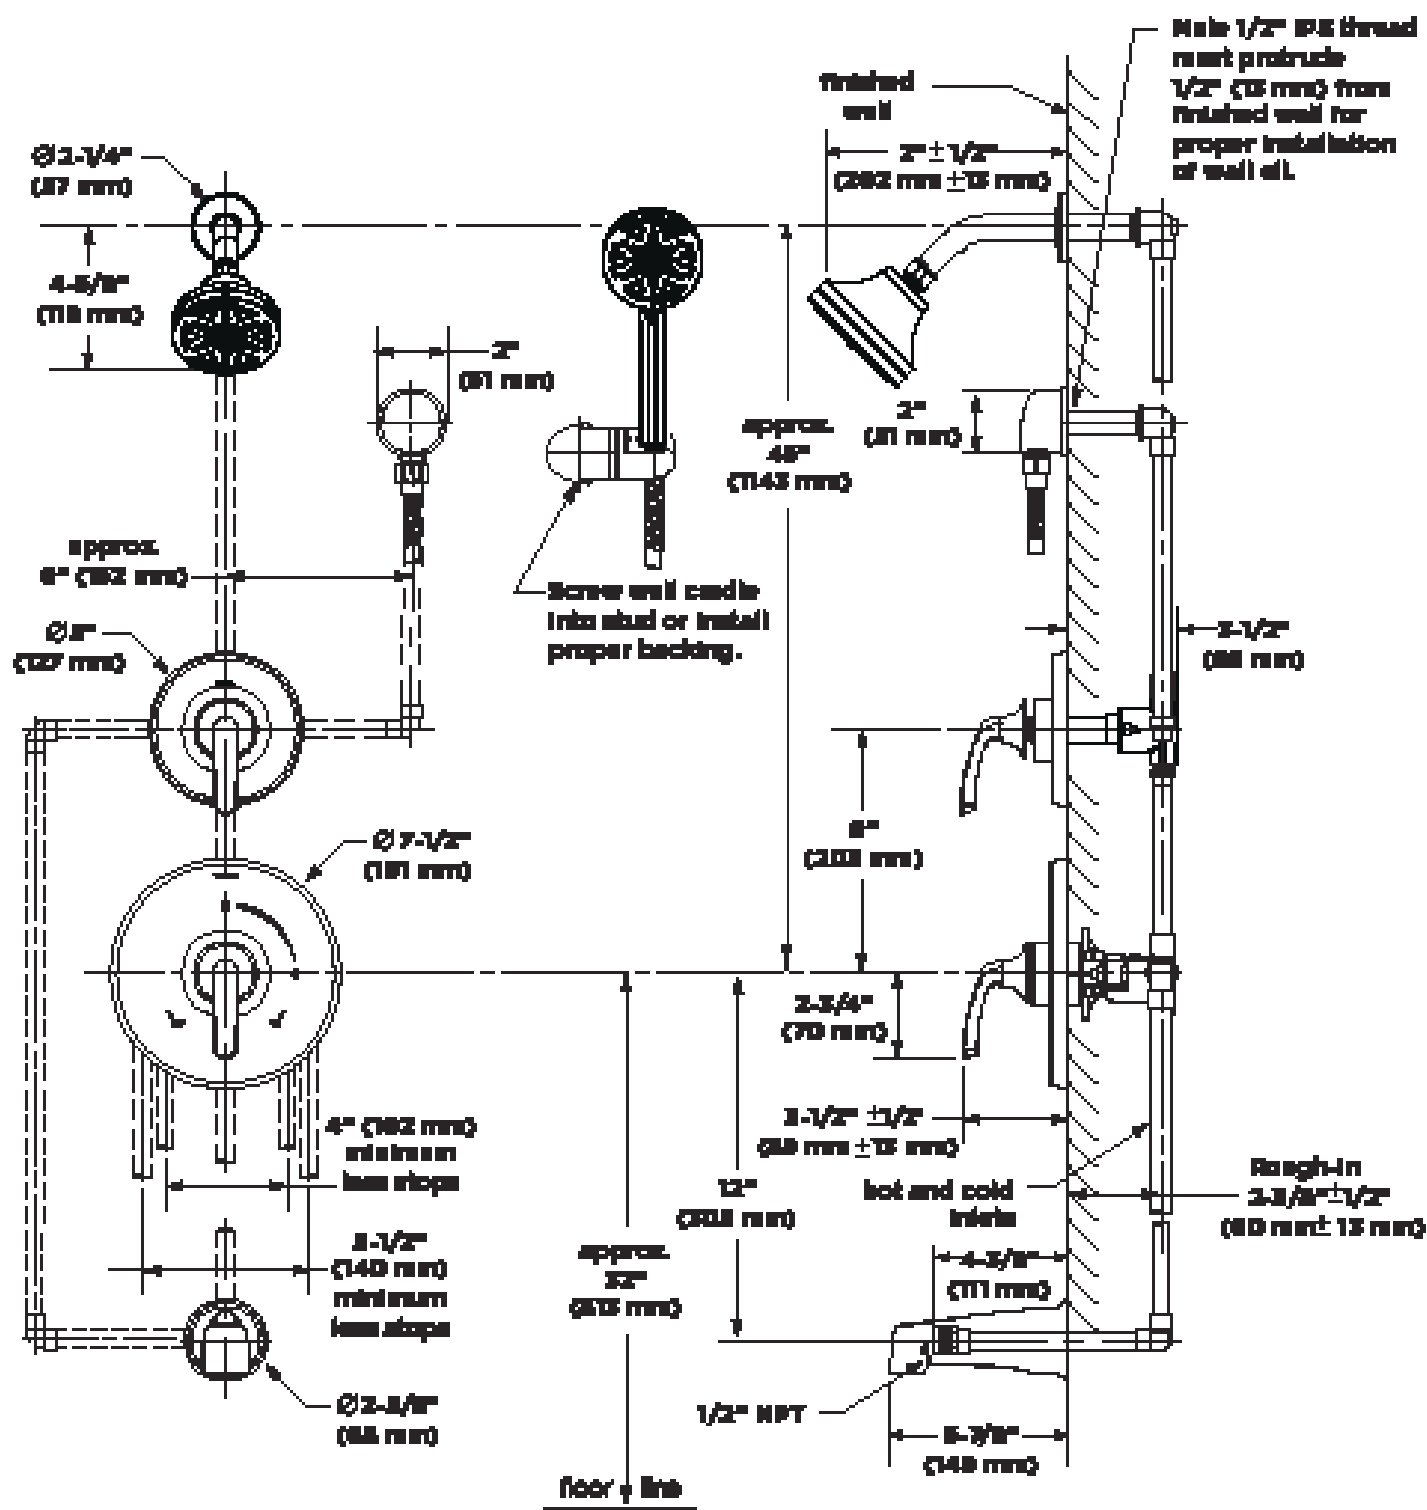

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.