

5595TRM Shower/Hand Shower Trim Specification Submittal

Location:

Model Numbers

- 5595TRM**
Shower/Hand Shower Trim

Valve Options:

- 261 Series Temptrol® Shower Valve with TRM modifier
- 161 Series Temptrol Shower Valve requires TC modifier
- 2DIVBODYSR

Feature Highlights

- Elm Tub/Shower/Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- Separate two-function diverter body.
- 60" flexible metal hose.
- 7-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO).
- 7-mode HydroMersion showerhead with Non-Positive Shutoff (NPSO).
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components made from metal and nonmetal materials plated in standard Polished Chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle and hand shower wand meet ADA requirements for operation



Modifications

- 15** 1.5 gpm (5.7 L/min) flow restrictor
- TC** Test Cap Trim (includes TA-10™ & T-12A) *used with 161 Series Temptrol Shower Valve*
- L1** Less showerhead
- L2** Less hand shower (wand only)
- L3** Less showerhead and hand shower (head and wand only)
- L4** Less head, arm, and flange
- L5** Less hand shower system
- L7** Less handle
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
 Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
5595	STN			TRM		5595STNTRM
5595	MB	L3	15	TRM	TC	5595MBL315TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Elm Shower and Hand Shower System _____ Includes Elm Shower/Hand Shower System for Temptrol® Pressure-Balancing Shower Valve. Features in-line vacuum breaker, 60" flexible metal hose, 7-mode HydroMersion hand shower with NPSO, 7-mode HydroMersion showerhead with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle and hand shower wand meet ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower (wand only), L3 = Less showerhead and hand shower (head and wand only), L4 = Less head, arm, and flange, L5 = Less hand shower system, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, and TC = Test Cap Trim.

Dimensions

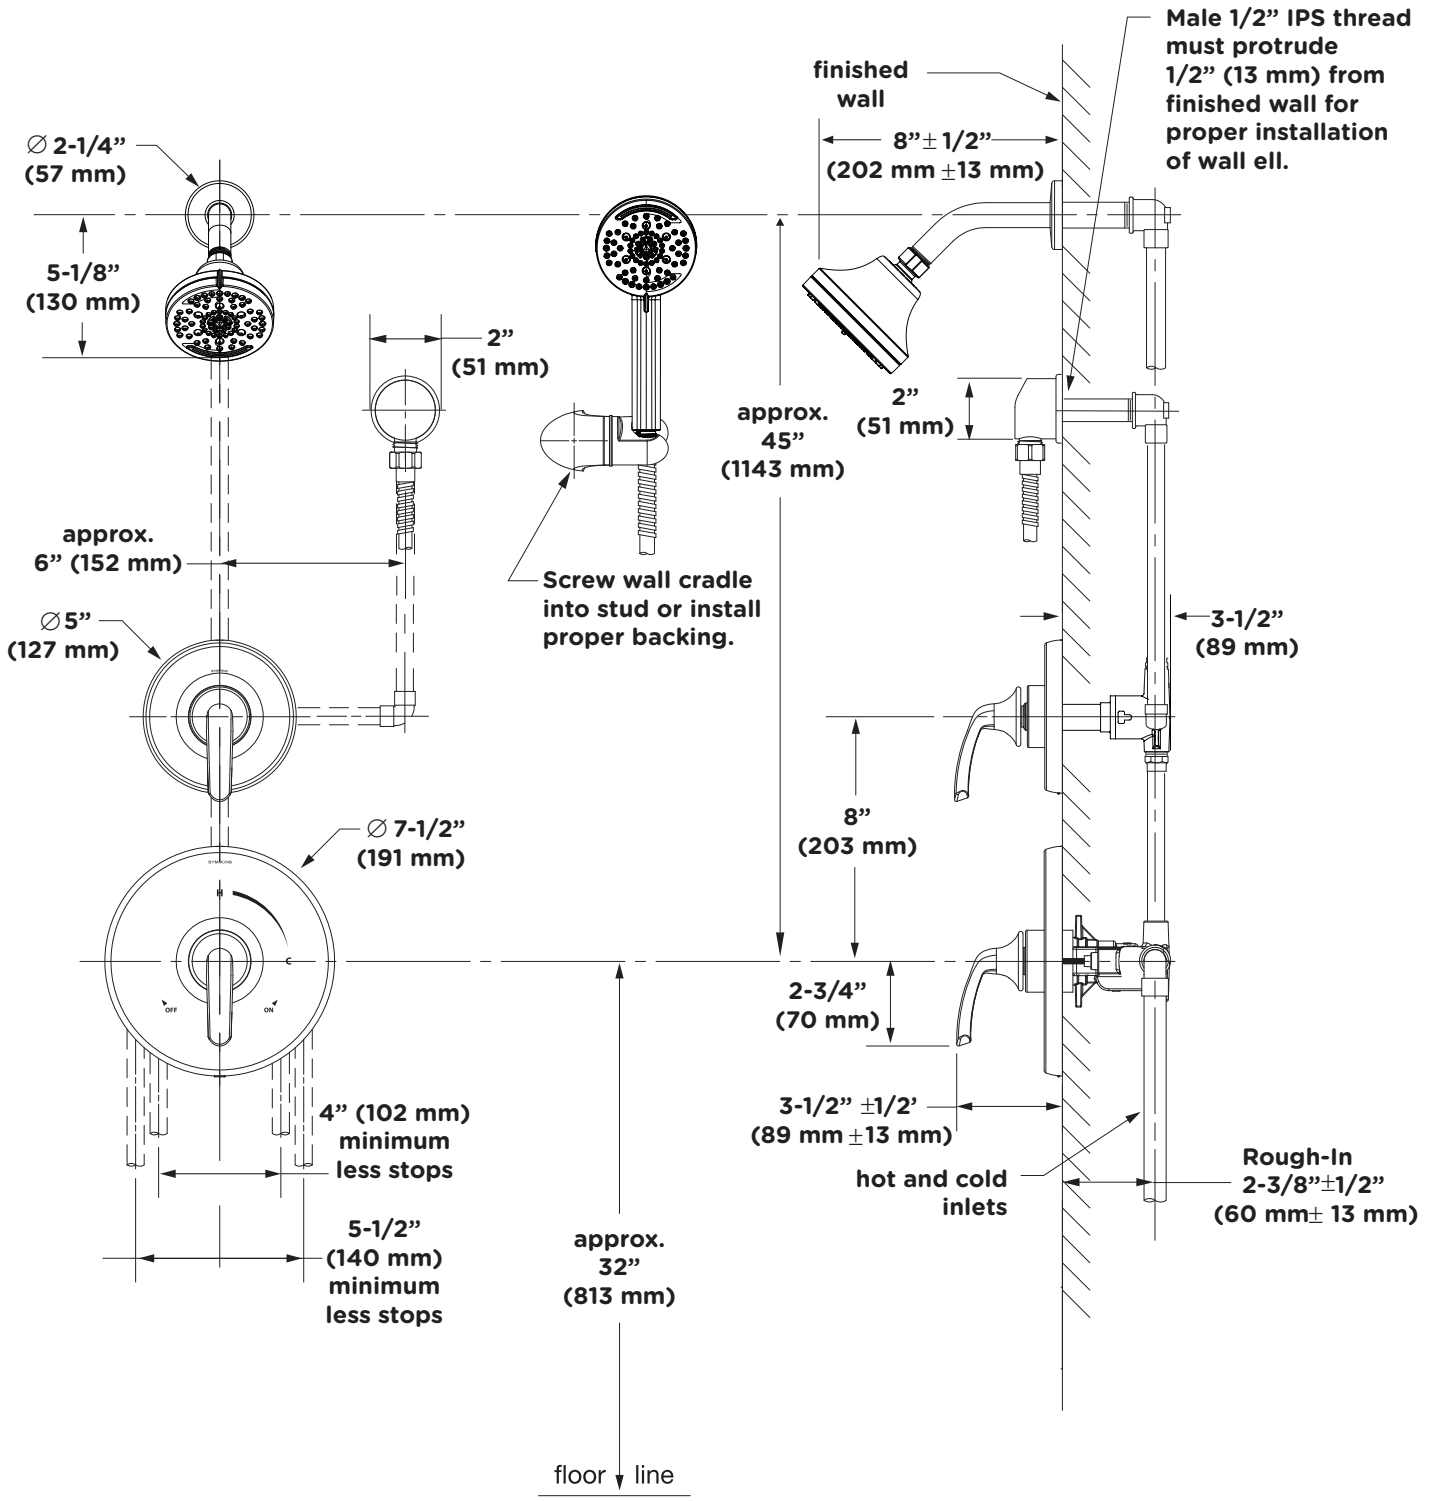

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls $\frac{1}{2}$ " or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.