

S3598BTRM
Shower/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

- S3598BTRM**
Shower/Hand Shower Trim
- Valve Options:**
-S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
-S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

Feature Highlights

- Dia Shower/Hand Shower Trim.
- Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.
- Integral diverter control.
- Metal lever handle.
- 30" slide bar for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- 7-mode Hydromersion™ hand shower wand with Non-Positive Shutoff (NPSO).
- 7-mode HydroMersion showerhead with Non-Positive Shutoff (NPSO).
- 2.0 gpm (7.6 L/min) flow restrictors.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation




Options/Modifications

- 15** 1.5 gpm (5.7 L/min) flow restrictor
- 175** 1.75 gpm (6.6 L/min) flow restrictor
- Delete Suffix B** Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish
- L1** Less showerhead
- L2** Less hand shower wand
- L3** Less showerhead and hand shower wand
- L4** Less head, arm, and flange
- L5** Less hand shower system (less bar/cradle, hose, wand, and elbow)
- L7** Less handle
- TC** Test Cap Trim (includes TA-10™ & T-12A) used with S162 Series Temptrol VersaFlex Valve

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S3591B	STN		15	TRM		S3591BSTN15TRM
S3591	MB	L1		TRM	TC	S3591BML1TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Dia Shower and Hand Shower Trim _____ Includes Dia Shower and Hand Shower Trim for Temptrol VersaFlex Pressure-Balancing Shower Valve. Features integral diverter control, metal lever handle, 30" slide bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 7-mode HydroMersion hand shower wand with NPSO, 7-mode HydroMersion showerhead with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, STN = Satin Nickel finish, MB = Matte Black finish, BBZ = Brushed Bronze finish, L1 = Less showerhead, L2 = Less hand shower wand, L3 = Less showerhead and hand shower wand, L4 = Less head, arm, and flange, L5 = Less hand shower system (less bar/cradle, hose, wand, and elbow), L7 = Less handle, and TC = Test Cap Trim.

Dimensions

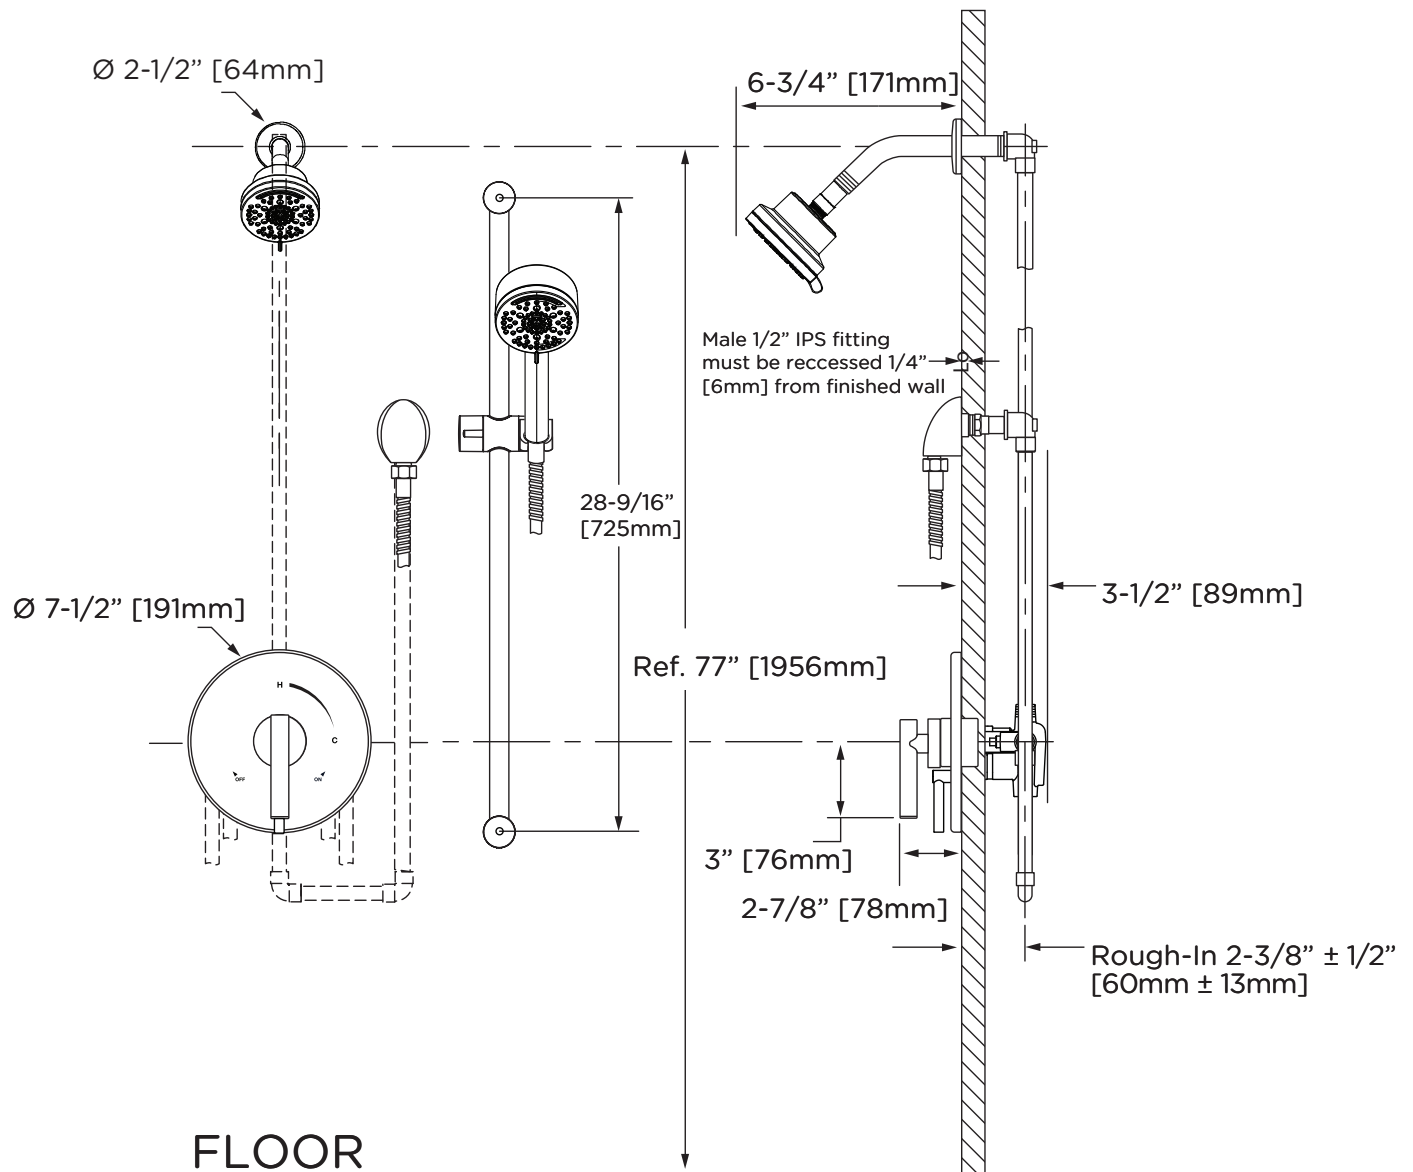

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster or other type walls $1/2''$ or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.