





Location:

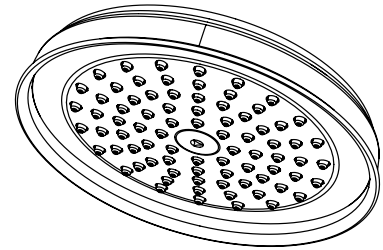

402SH2

Shower Head

Specification Submittal

Model Numbers	Feature Highlights
<input type="checkbox"/> 402SH2 Shower Head	<ul style="list-style-type: none">• Showerhead, 1 mode, 8-1/2 inch diameter• Standard flow rate is 2.0 gpm (7.6 L/min)• Optional lower flow rate restrictor available• Metal construction• Polished chrome finish (standard)
Options/ Modifications	
<input type="checkbox"/> 1.5 1.5 (5.7 L/min) Flow rate restrictor	
<input type="checkbox"/> STN Satin Nickel finish	
Note: Append appropriate suffix to model number.	
Compliance	Warranty
<ul style="list-style-type: none">- ASME A112.18.1/CSA B125.1-WaterSense 2.0 gpm (7.6 L/min) MAX-WaterSense 1.5 gpm (5.7 L/min) MIN  	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 



Architectural/ Engineering Specification

Symmons Showerhead _____ Includes Showerhead, 1 mode, 8-1/2 inch diameter, Standard flow rate is 2.0 gpm (7.6 L/min), Optional lower flow rate restrictor available, Metal construction, Polished chrome finish (standard). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 2.0 gpm (7.6 L/min) MAX, WaterSense 1.5 gpm (5.7 L/min) MIN compliant. Available options: "1.5 - 1.5 (5.7 L/min) Flow rate restrictor", "STN - Satin Nickel finish".



402SH2

Dimensions

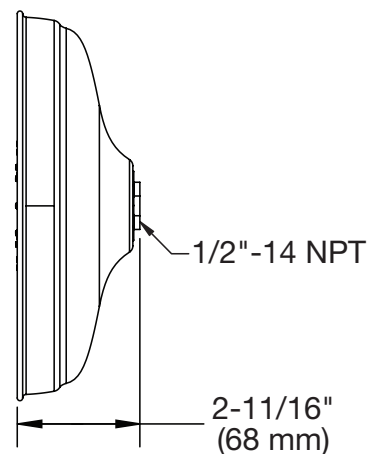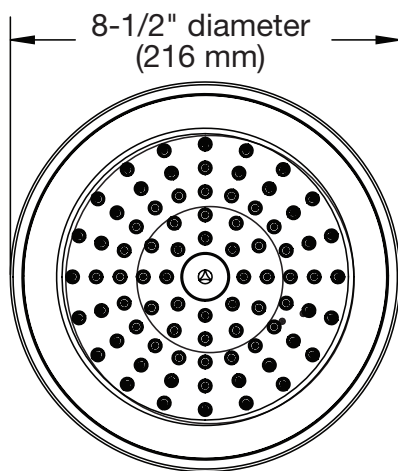

Note: *Dimensions subject to change without notice.*