



HS501 Single-Mode Hand Shower Specification Submittal

Location:

Model Numbers

- ☐ **HS501** Single-Mode HydroMersion® Hand Shower

Options/Modifications

- ☐ **15**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **BBZ** Brushed Bronze finish
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish

Compliance

- ASME A112.18.1/CSA B125.1
- Hand shower wand meets ADA requirements for operation.



Feature Highlights


- 4" square single-mode HydroMersion hand shower wand with Non-Positive Shutoff (NPSO).
- Wall cradle for hand shower wand mounting.
- 60" flexible metal hose.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Warranty

Limited Lifetime - for residential installations.

10 Years - for commercial/industrial installations.

Refer to www.symmons.com/warranty for complete warranty information.




SKU Builder

Series	Finish	Flow Rate	Final SKU
HS501		15	HS50115
HS501	MB		HS501MB

Architectural/Engineering Specification

Symmons Single-Mode Hand Shower _____ Features 4" square single-mode HydroMersion hand shower wand with NPSO, wall cradle for hand shower wand mounting, 60" flexible metal hose, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Hand shower wand meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

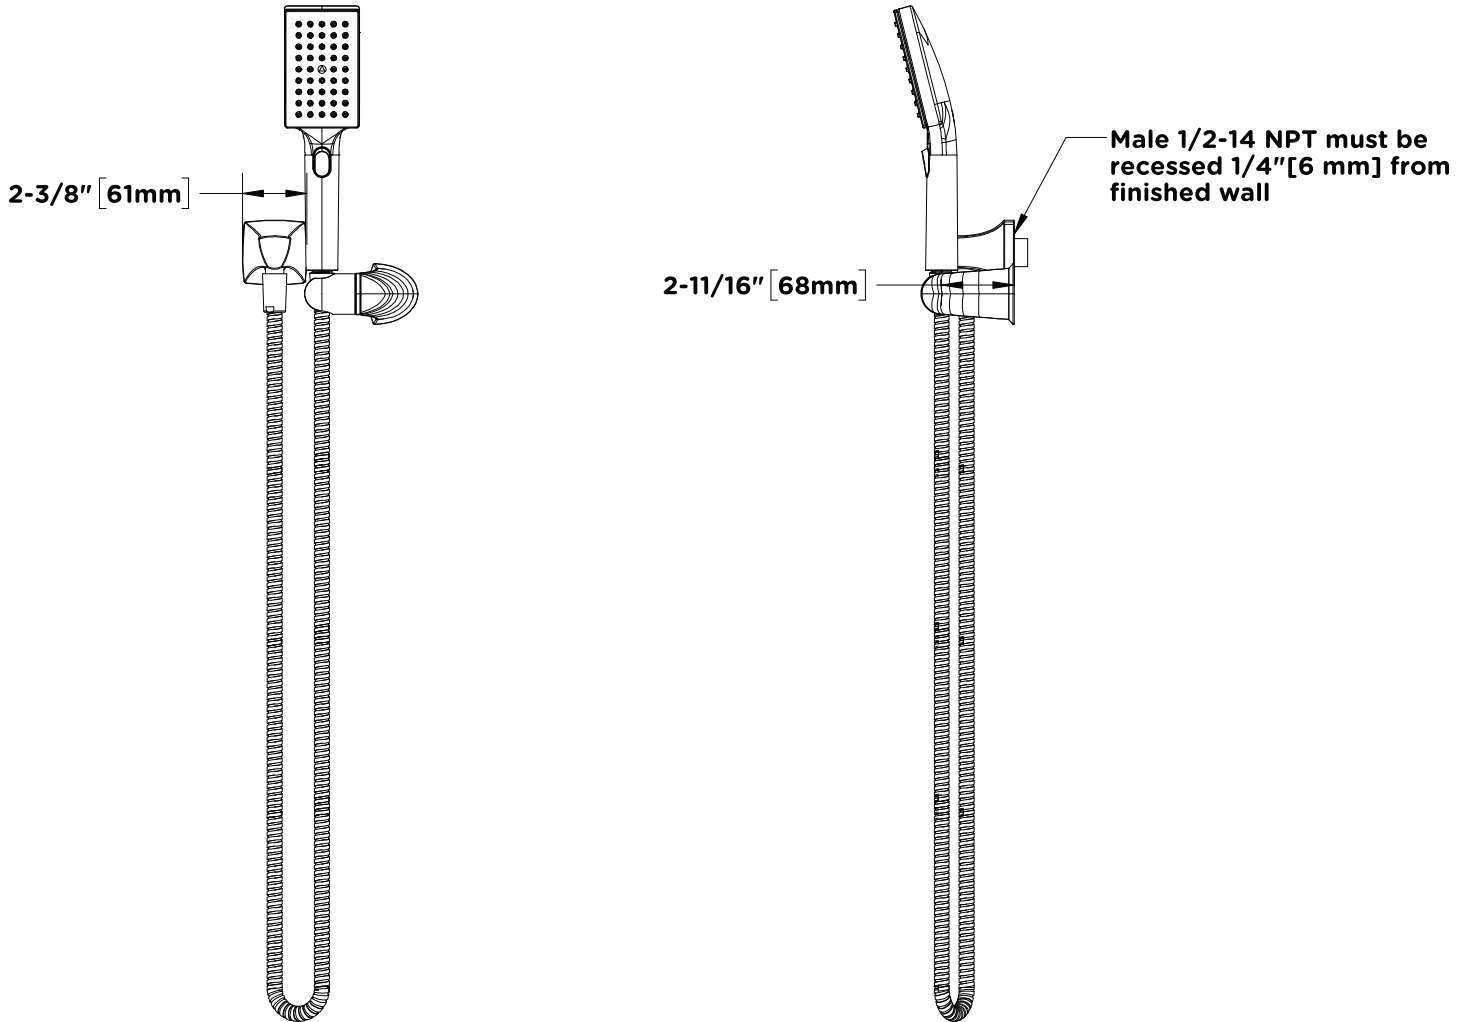

Note: Dimensions are subject to change without notice.