

Location:



SYMMONS®




Winslet®



5101-TRM, 5101TRMTC

Shower Trim

Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none">Winslet Shower TrimRequires Temptrol® Pressure Balancing Shower ValveMetal lever handle1 mode showerhead2.0 gpm (7.6 L/min) flow restrictorTub spout not includedComponents shall be metal and nonmetallic construction, plated in standard Polished Chrome finishAvailable with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5101TRMTC)	<ul style="list-style-type: none"><input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor<input type="checkbox"/> -L1 Less showerhead<input type="checkbox"/> -STN Satin Nickel finish <p>Note: Append appropriate -suffix to model number.</p>
Model Numbers	Warranty
<ul style="list-style-type: none"><input type="checkbox"/> 5101-TRM Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately<input type="checkbox"/> 5101TRMTC Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
Compliance	
<ul style="list-style-type: none">ASME A112.18.1/CSA B125.1 	


Architectural/ Engineering Specification

Symmons _____ With Winslet Shower Trim, requires Temptrol® pressure balancing shower valve, metal lever handle, 1 mode showerhead, 2.0 gpm (7.6 L/min) flow restrictor, tub spout not included, components shall be metal and nonmetallic construction, plated in standard polished chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap, (order p/n 5101TRMTC). 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictorm", "L1 - Less showerhead", "STN - Satin Nickel finish".



5101-TRM, 5101TRMTC

Dimensions

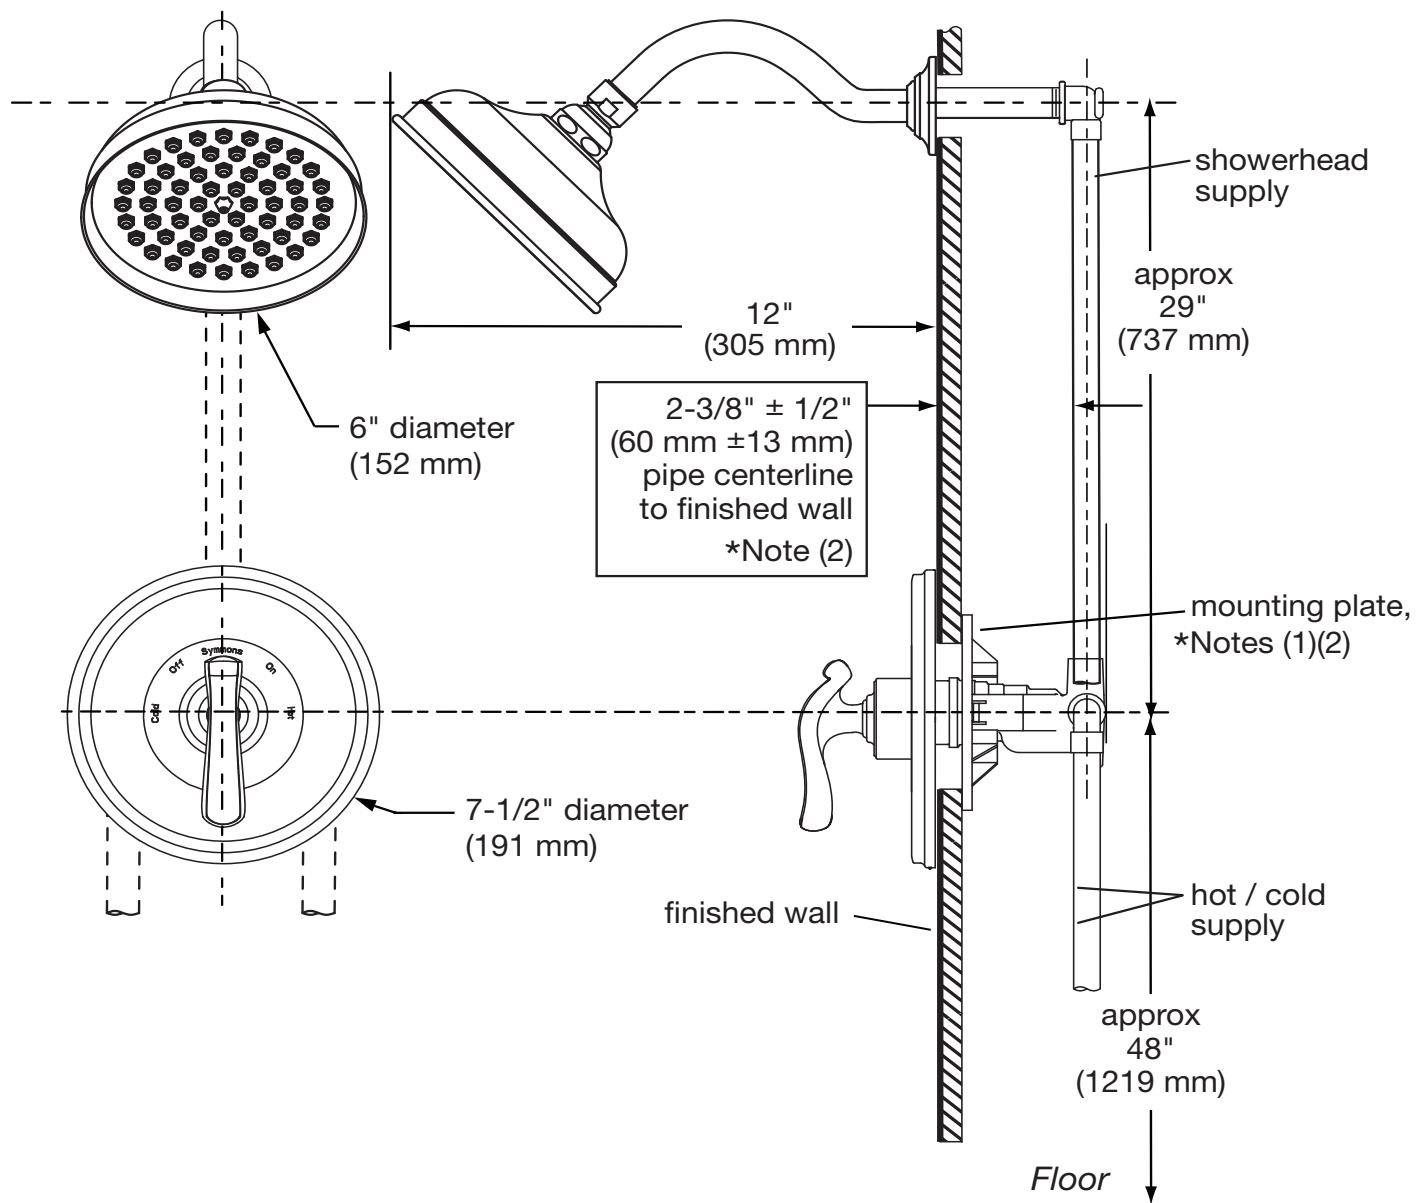

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.