





S2502G, S2502PP Centerset Lavatory Faucet **Specification Submittal**

S2502 Standard handle S2502 LWG handle

Model Numbers Feature Highlights ☐ S2502G Faucet with Grid Strainer Drain Assembly Cast brass spout for 4" centerset lavatory faucet. Quarter-turn ceramic control components with two ☐ S2502PP Faucet with Push-Pop Drain Assembly blade handles. 1/2-inch IPS shanks. Components shall be metal construction. **Options/Modifications** Standard Polished Chrome finish. Standard 1.0 gpm (3.8 L/min) flow rate. ☐ **LWG** Wrist blade handles ☐ **05 66** 0.5 gpm (1.9 L/min) aerator flow restrictor

Location:

Compliance

- ASME® A112.18.1/CSA® B125.1
- NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372
- Lever handles meet ADA requirements for operation
- -0.5 gpm option meets CALGreen requirements

Warranty

Limited Lifetime - for residential installations.

10 Years - for commercial/industrial installations.

Refer to www.symmons.com/warranty for complete warranty information.




SKU Builder

Series	Handle Modifier	Flow Rate	Final SKU
S2502G	LWG		S2505GLWG
S2502PP		05	S2502PP05

Architectural/Engineering Specification

Symmons Symmetrix Lavatory Faucet Includes cast brass spout for 4" centerset lavatory faucet, quarter-turn ceramic control components with two blade handles, 1/2-inch IPS shanks, and standard 1.0 gpm (3.8 L/min) flow rate. Components shall be metal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, lever handles meet ADA requirements for operation. 0.5 gpm option meets CALGreen requirements. Available options: LWG = Wrist blade handles and 05 = 0.5 gpm (1.9 L/min) aerator flow restrictor.

Dimensions

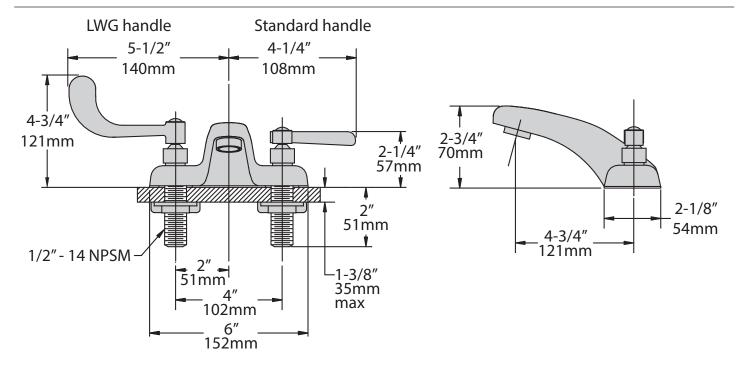

Note: Dimensions subject to change without notice.

