






Location:



S6608TRM, S6608TRMTC Shower/Hand Shower Trim Specification Submittal




Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> • Unity Shower/Hand Shower Trim • Requires Temptrol® Pressure Balancing Tub/Shower Valve • Integral diverter control • Metal lever handle • Cradle for hand shower wand • 60" flexible metal hose • 1 mode hand shower • Dual checks for backflow protection • 1 mode showerhead with easy to clean nozzles • 2.0 gpm (7.6 L/min) flow restrictors • Tub spout not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S6608TRMTC) • For optional in-line vacuum breaker order p/n EF-109 	<div> <input type="checkbox"/> 1.5  1.5 gpm (5.7 L/min) flow restrictor </div> <div> <input type="checkbox"/> L1 Less showerhead </div> <div> <input type="checkbox"/> L2 Less hand shower wand (wand only) </div> <div> <input type="checkbox"/> L3 Less showerhead & hand shower (head and wand only) </div> <div> <input type="checkbox"/> L4 Less head, arm and flange </div> <div> <input type="checkbox"/> L5 Less hand shower system (less cradle, hose, wand and elbow) </div> <div> <input type="checkbox"/> L7 Less handle </div> <div> <input type="checkbox"/> STN Satin Nickel finish </div> <p>Note: Append appropriate -suffix to model number.</p>
Model Numbers	Warranty
<div> <input type="checkbox"/> S6608TRM Shower/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately </div> <div> <input type="checkbox"/> S6608TRMTC Shower/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap </div>	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
Compliance	
<ul style="list-style-type: none"> • ASME A112.18.1/CSA B125.1 • WaterSense 1.5 gpm (5.7 L/min) • 2.0 gpm (7.6 L/min) <div>   </div>	

Architectural/ Engineering Specification

Symmons _____ With Unity Shower/Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve, Integral diverter control, Metal lever handle, Cradle for hand shower wand, 60" flexible metal hose, 1 mode hand shower, Dual checks for backflow protection, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S6608TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) Complaint. Available options include "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower", "L4 - Less head, arm and flange", "L5 - Less hand shower system", "L7 - Less handle", "STN - Satin nickel finish".

Dimensions

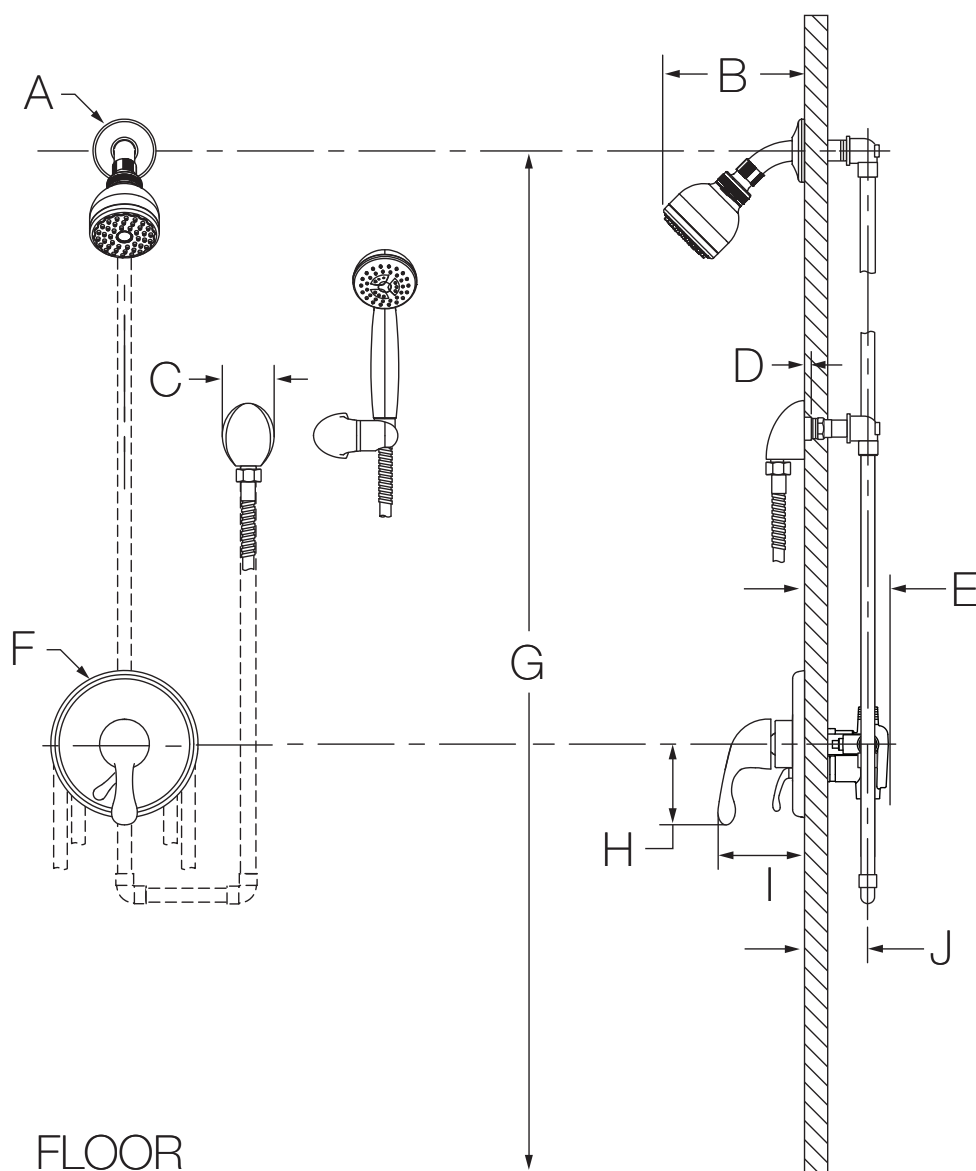

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/8", 162 mm
C	2-1/8", 54 mm
D	Male 1/2" IPS fitting must be recessed 1/4" (6 mm) from finished wall
E	3-1/2", 89 mm
F	Ø 6-3/8", 162 mm
G	Ref. 77", 1956 mm
H	3-1/2", 89 mm
I	3-3/4", 95 mm
J	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.