




3696TRM
Tub/Shower/Hand Shower Trim
Specification Submittal

Location:



Model Numbers

3696TRM
Tub/Shower/Hand Shower Trim

Valve Options:

- 261 Series Temptrol® Shower Valve with TRM modifier
- 161 Series Temptrol Shower Valve requires TC modifier
- 3DIVBODYSRT

Feature Highlights

- Duro Tub/Shower/Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- Separate three-function diverter body.
- Metal lever handle.
- 30" slide bar for hand shower wand.
- Dual checks for backflow protection
- 60" flexible metal hose.
- 5-11/16" square slip-on tub spout.
- Single-mode HydroMersion™ showerhead.
- Single-mode HydroMersion hand shower wand with Non-Positive Shutoff (NPSO).
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min).
- Lever handle meets ADA requirements for operation.



Options/Modifications

<input type="checkbox"/> 15		1.5 gpm (5.7 L/min) flow restrictor
<input type="checkbox"/> BBZ		Brushed Bronze finish
<input type="checkbox"/> MB		Matte Black finish
<input type="checkbox"/> STN		Satin Nickel finish
<input type="checkbox"/> L1		Less showerhead
<input type="checkbox"/> L2		Less hand shower
<input type="checkbox"/> L3		Less showerhead and hand shower
<input type="checkbox"/> L5		Less hand shower system
<input type="checkbox"/> L7		Less handle
<input type="checkbox"/> TC		Test Cap Trim (includes TA-10™ & T-12A) used with 161 Series Temptrol Shower Valve

Warranty

Limited Lifetime - for residential installations.

10 Years - for commercial/industrial installations.

Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
3696	STN		15	TRM		3696STN15TRM
3696	MB	L3		TRM	TC	3696MBL3TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Duro Tub and Shower and Hand Shower Trim _____ Includes Duro Tub/Shower/Hand Shower Trim for Temptrol Pressure-Balancing Shower Valve. Features metal lever handle, 30" slide bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 5-11/16" square slip-on tub spout, single-mode HydroMersion hand shower wand with NPSO, single-mode HydroMersion showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower, L3 = Less showerhead and hand shower, L5 = Less hand shower system, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, and TC = Test Cap Trim.

Dimensions

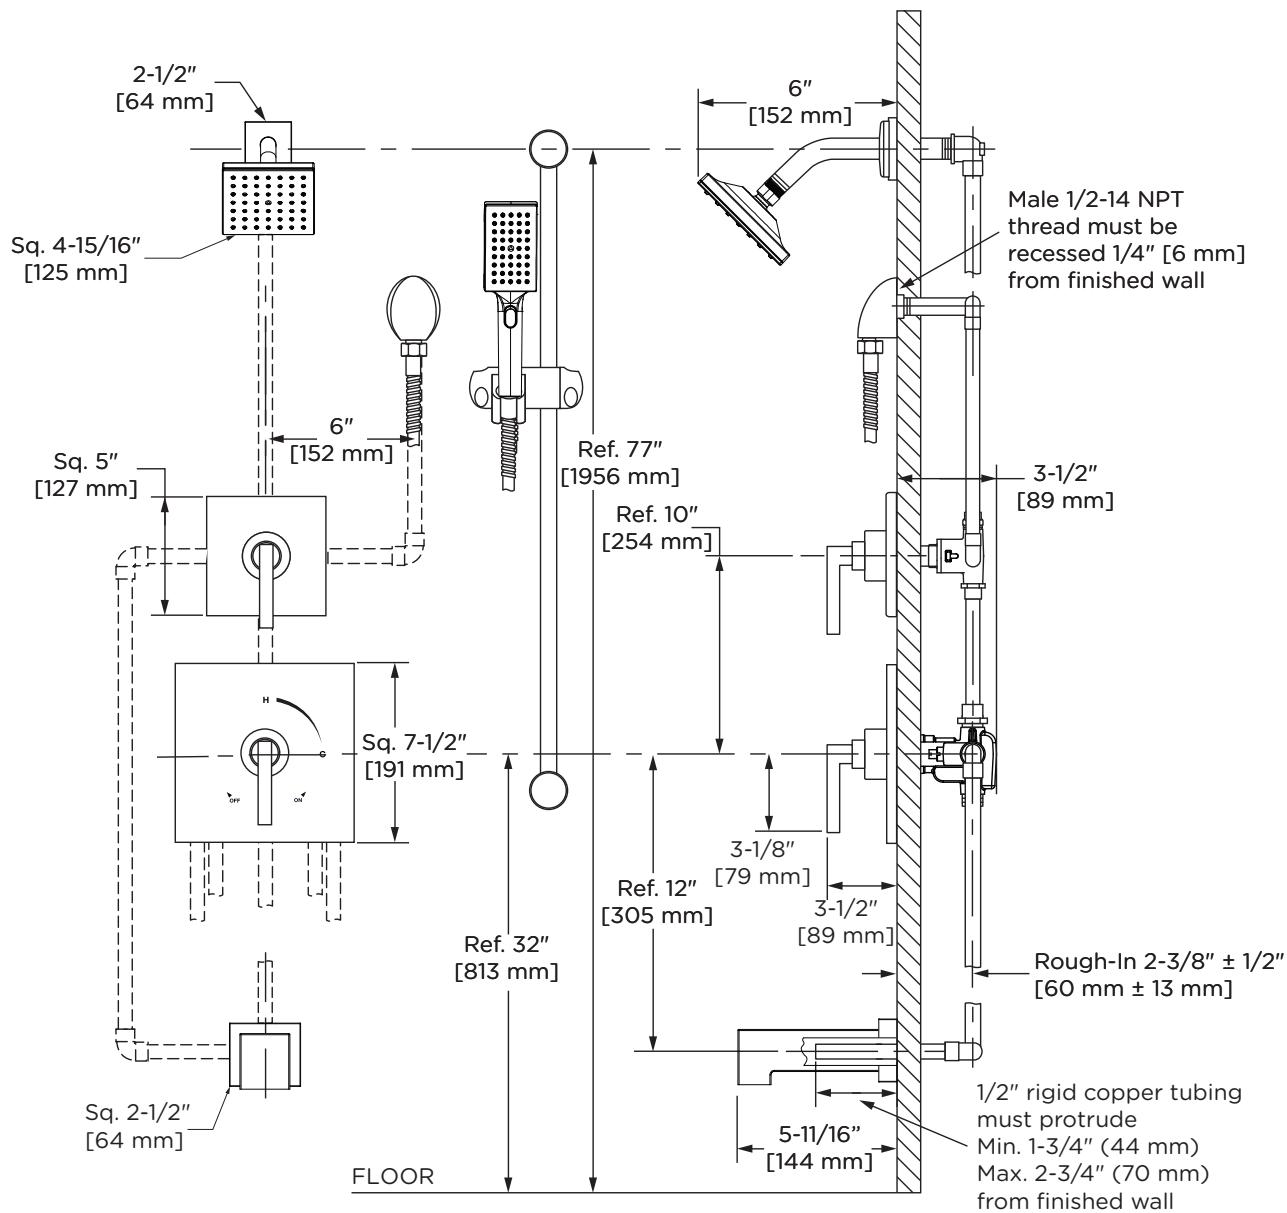

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.