







Location:

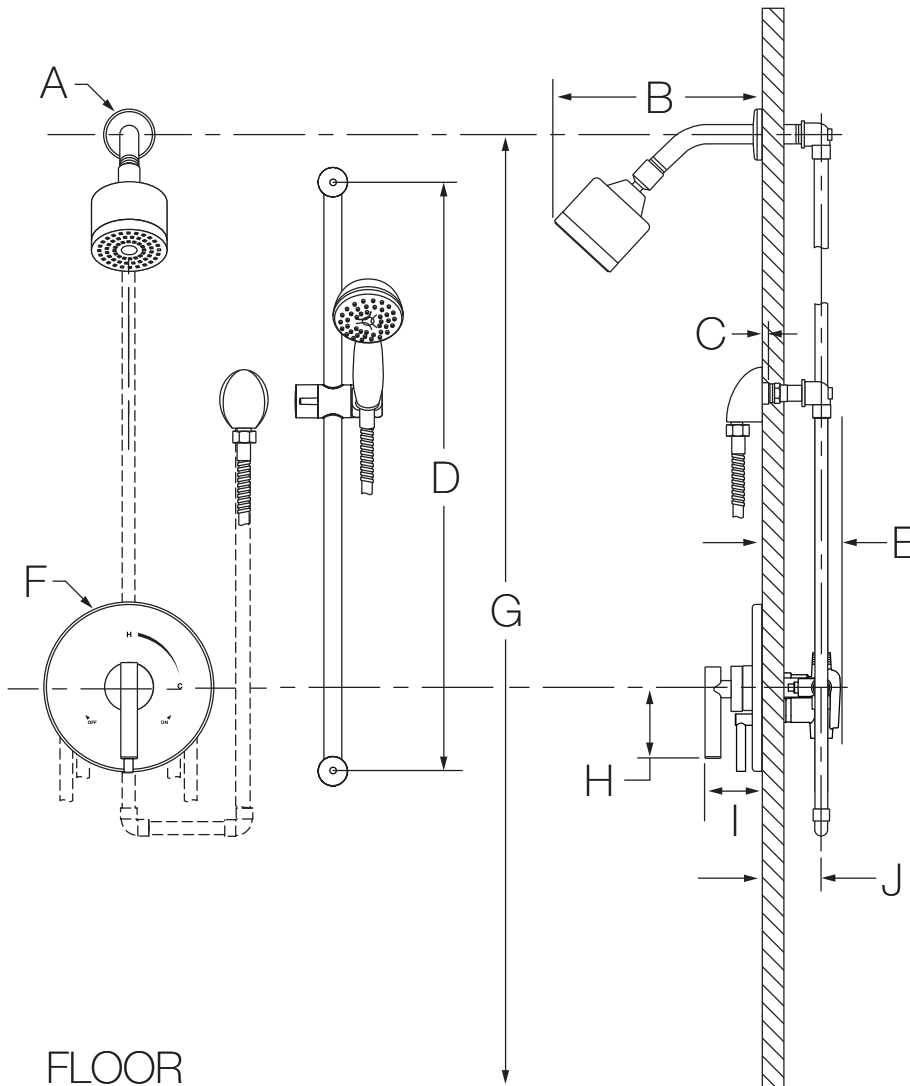


S3508BTRM
Shower/Hand Shower Trim
Specification Submittal

Model Numbers	Feature Highlights
<p><input type="checkbox"/> S3508BTRM Tub/Shower System Trim (use when ordering L1-L7 and TC modification, do not use hyphens or decimal points) Note: To create sku, follow the format: Base SKU -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard) -> TRM -> TC</p>	<ul style="list-style-type: none"> • Dia Shower/Hand Shower Trim • Requires Temptrol® Pressure Balancing Tub/Shower Valve • Integral diverter control • Metal lever handle • 30" slide bar for hand shower wand • Dual checks for backflow protection • 60" flexible metal hose • 1 mode hand shower wand • 1 mode showerhead • 2.0 gpm (7.6 L/min) flow restrictors • Tub spout not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
Compliance	Options/ Modifications
<p>- ASME A112.18.1/CSA B125.1 - WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</p>  	<ul style="list-style-type: none"> <input type="checkbox"/> 1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> 1.75  1.75 gpm (6.6 L/min) flow restrictor <input type="checkbox"/> Delete Suffix B Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> -MB Matte Black finish <input type="checkbox"/> -BBZ Brushed Bronze finish <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L2 Less hand shower wand <input type="checkbox"/> L3 Less showerhead & hand shower wand <input type="checkbox"/> L4 Less head, arm and flange <input type="checkbox"/> L5 Less hand shower system (less bar/ cradle, hose, wand and elbow) <input type="checkbox"/> L7 Less handle <input type="checkbox"/> TC Test Cap Trim (includes TA-10&T-12A) <i>used with 16 series Temptrol Valve</i>
Warranty	
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 	

Architectural/ Engineering Specification

Symmons Dia Shower and Hand Shower Trim _____ Includes Dia Shower and Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub and Shower Valve, Integral diverter control, Metal lever handle, 30" slide bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 1 mode hand shower wand, 1 mode showerhead, 2.0 gpm (7.6 L/min) flow restrictors, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S3508BTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow restrictor", "Delete Suffix B - Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon", "STN - Satin Nickel finish", "MB - Matte Black finish", "BBZ - Brushed Bronze finish", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm and flange", "L5 - Less hand shower system (less bar/ cradle, hose, wand and elbow)", "L7 - Less handle", "TC - Test Cap Trim".

Dimensions


Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/4", 171 mm
C	Male 1/2" IPS fitting must be recessed 1/4" (6 mm) from finished wall
D	28-9/16", 725 mm
E	3-1/2", 89 mm
F	Ø 7-1/2", 191 mm
G	Ref. 77", 1956 mm
H	3", 76 mm
I	2-7/8", 73 mm
J	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.