

# Location:



**SYMMONS®** Origins<sup>®</sup>



S-9602-PLR, S-9602-PLR-TRM, S9602PLR, S9602PLRTRM  
Tub/Shower System or Trim

## Specification Submittal

### Feature Highlights

- Origins Tub/Shower System or Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9602-PLR)
- Adjustable stop screw to limit handle turn (included with S-9602-PLR)
- Integral diverter control
- Metal lever handle
- 1 mode showerhead with easy to clean nozzles
- 5-1/4" non-diverter tub spout
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9602PLRTRMTC)

### Model Numbers

- ☐ **S-9602-PLR**  
Tub/Shower System with integral volume control & Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- ☐ **S9602PLR**  
Tub/Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- ☐ **S-9602-PLR-TRM**  
Tub/Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- ☐ **S9602PLRTRM**  
Tub/Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

#### Note:

-To create trim sku, follow the format:  
Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard) -> TRM -> TC (If applicable)  
-To create valve & trim sku, follow the format:  
Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard)  
-For B and REV modifications, contact customer service for your sku

### Options/Modifications

- ☐ **1.5** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L4** Less head, arm and flange
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim
- ☐ **-CHKS** Integral check stops
- ☐ **-STN** Satin Nickel finish
- ☐ **-B** Brass escutcheon (chrome only)
- ☐ **-X** Integral service stops - allows water shut-off at valve for service

### Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (S-9602-PLR only)
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)



### Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.




## Architectural/ Engineering Specification

Symmons Origins \_\_\_\_\_ With Origins Tub/Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9602-PLR), Adjustable stop screw to limit handle turn (included with S-9602-PLR), Integral diverter control, Metal lever handle, 1 mode showerhead with easy to clean nozzles, 5-1/4" non-diverter tub spout, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9602PLRTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L7 - Less handle", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stops", and "TC - Test cap Trim".

S-9602-PLR, S-9602-PLR-TRM, S9602PLR, S9602PLRTRM

## Dimensions

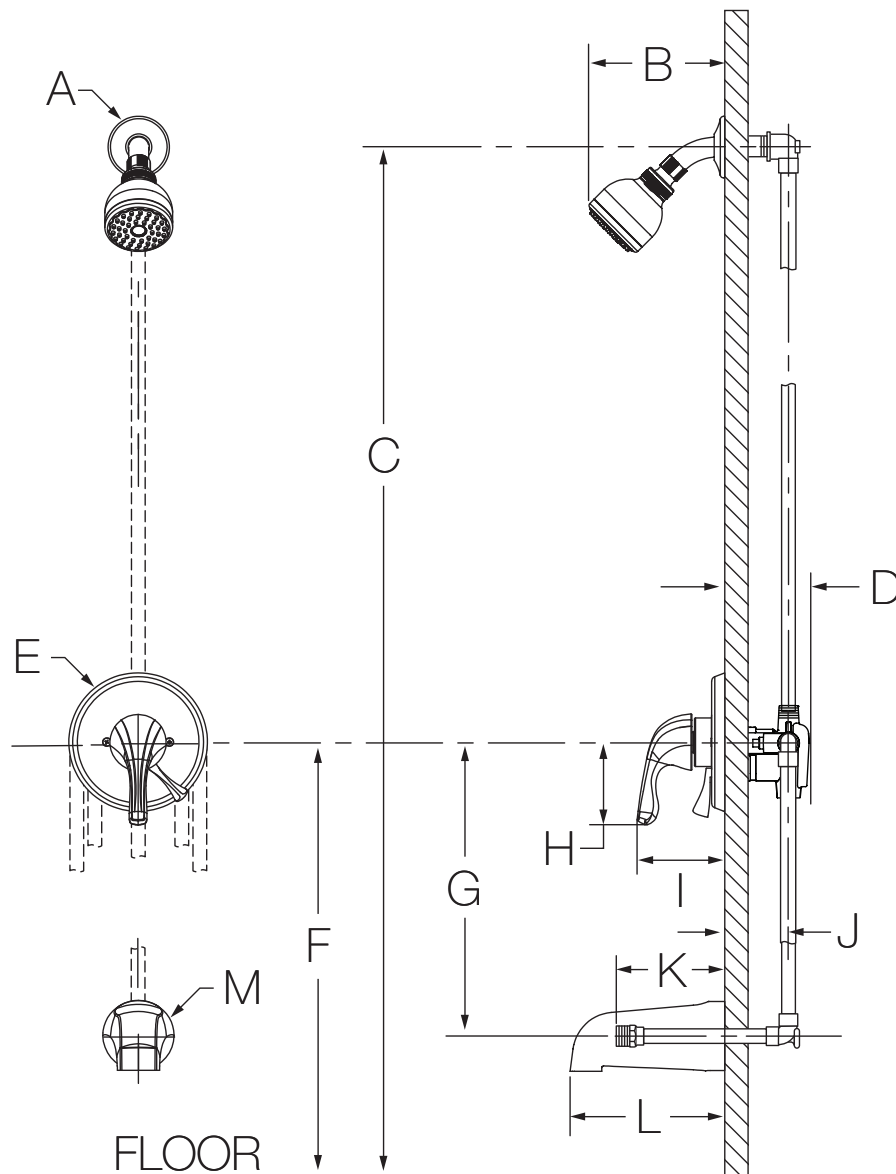

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/8", 162 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 5-3/4", 146 mm
F	Ref. 32", 813 mm
G	Ref. 12", 305 mm
H	3-3/8", 86 mm
I	3-5/8", 92 mm
J	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
K	Male 1/2-14 NPT fitting must protrude 4" (102 mm) from finished wall
L	5-1/4", 133 mm
M	Ø 2-1/2", 64 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.