

Location:



SYMMONS® Origins®



S-9601-PLR, S-9601-PLR-TRM, S9601PLR, S9601PLRTRM Shower System or Trim Specification Submittal

Feature Highlights

- Origins Shower System or Trim
- Requires Temptrol® Pressure Balancing Shower Valve (included with S-9601-PLR)
- Adjustable stop screw to limit handle turn (included with S-9601-PLR)
- Integral volume control
- Metal lever handle
- 1 mode showerhead with easy to clean nozzles
- Diverter tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9601PLRTRMTC)

Model Numbers

- ☐ **S-9601-PLR**
Shower System with integral volume control & Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- ☐ **S9601PLR**
Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- ☐ **S-9601-PLR-TRM**
Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- ☐ **S9601PLRTRM**
Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

Note:

-To create trim sku, follow the format:
Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard) -> TRM -> TC (If applicable)
-To create valve & trim sku, follow the format:
Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard)
-For B and REV modifications, contact customer service for your sku

Options/Modifications

- ☐ **-1.5** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim
- ☐ **-CHKS** Integral check stops
- ☐ **-VP** Vandal resistant escutcheon screws in place of standard screws
- ☐ **-STN** Satin Nickel finish
- ☐ **-B** Brass escutcheon (chrome only)
- ☐ **-X** Integral service stops - allows water shut-off at valve for service

Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (S-9601-PLR only)
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.




Architectural/ Engineering Specification

Symmons Origins _____ With Origins Shower System or Trim, Requires Temptrol® Pressure Balancing Shower Valve (included with S-9601-PLR), Adjustable stop screw to limit handle turn (included with S-9601-PLR), Integral volume control, Metal lever handle, 1 mode showerhead with easy to clean nozzles, Diverter tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9601PLRTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stops", and "TC - Test Cap Trim".

S-9601-PLR, S-9601-PLR-TRM, S9601PLR, S9601PLRTRM

Dimensions

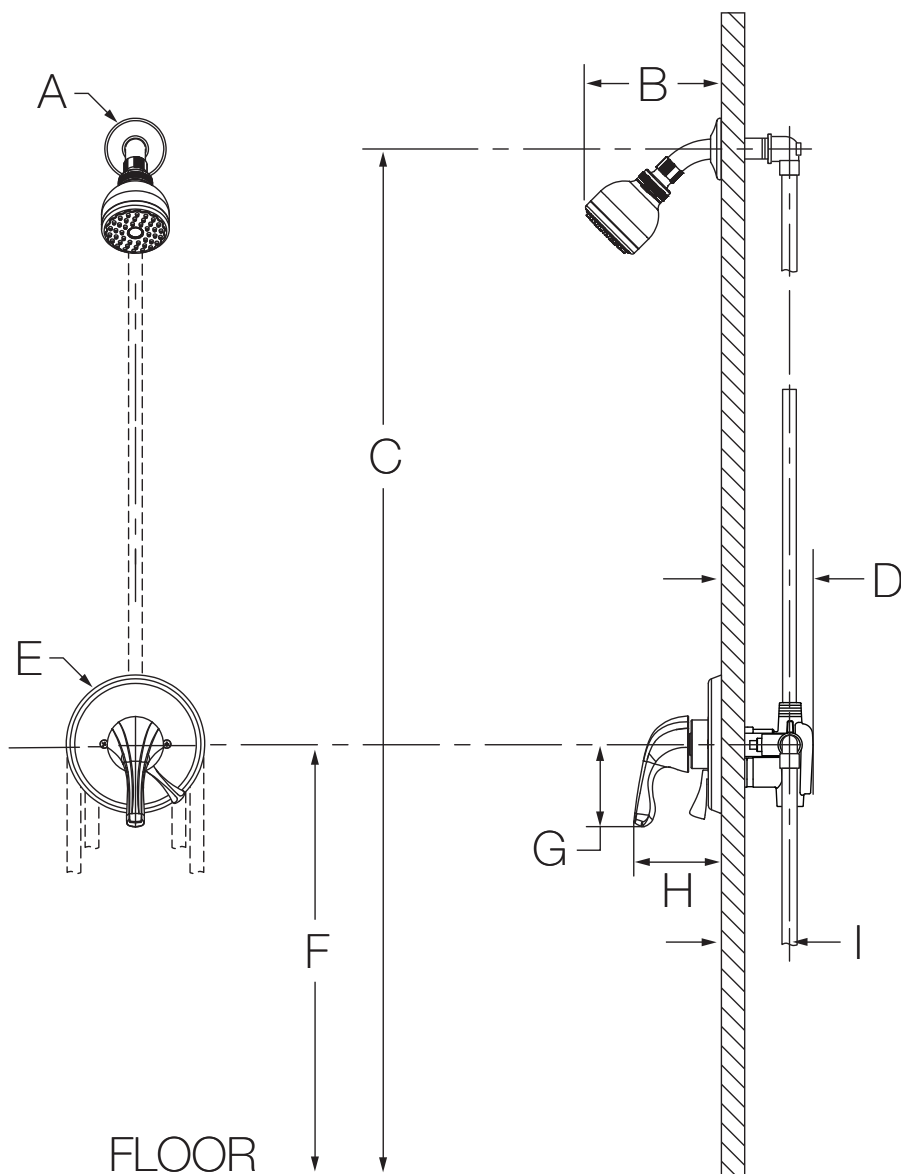

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/8", 162 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 5-3/4", 146 mm
F	Ref. 42", 1067 mm
G	3-3/8", 86 mm
H	3-5/8", 92 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.