




**SYMMONS®** Braston®

Location:



S5898TRM

Shower/Hand Shower Trim

## Specification Submittal

Model Numbers	Modifications
<input type="checkbox"/> <b>S5898TRM</b> Shower/Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately  <b>Valve Options:</b> -S262 Series Temptrol Shower Valve with TRM modifier -S162 Series Temptrol Shower Valve requires TC modifier	<input type="checkbox"/> <b>15</b> 1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> <b>L1</b> Less showerhead <input type="checkbox"/> <b>L2</b> Less hand shower <input type="checkbox"/> <b>L3</b> Less showerhead and hand shower <input type="checkbox"/> <b>L7</b> Less handle <input type="checkbox"/> <b>STN</b> Satin Nickel finish <input type="checkbox"/> <b>MB</b> Matte Black finish <input type="checkbox"/> <b>BBZ</b> Brushed Bronze finish <input type="checkbox"/> <b>TC</b> Test Cap Trim (includes TA-10&T-12A) used with 16 series Temptrol Valve  <b>Note:</b> Append appropriate suffix to model number.
Feature Highlights	Warranty
<ul style="list-style-type: none"><li>• Integral diverter control</li><li>• Metal lever handle</li><li>• 30" slide bar for hand shower wand</li><li>• Dual checks for backflow protection</li><li>• 60" flexible metal hose</li><li>• 7-Mode, NSPO hand shower</li><li>• 7-Mode, NPSO Showerhead</li><li>• 2.0 gpm (7.6 L/min) flow restrictors</li><li>• Components made from metal and nonmetal materials, plated in standard polished chrome finish</li></ul>	<b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations. <b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.
Compliance	
-ASME A112.18.1/CSA B125.1 -WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) -Lever handle meets ADA requirements	  



## SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S5898	MB	L3		TRM	TC	S5898MBL3TRMTC
S5898	MB			TRM		S5898MBTRM

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

## Architectural/Engineering Specification

Symmons Braston® Shower/Hand Shower Trim \_\_\_\_\_ Includes Braston® Shower/Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve, Integral diverter control, Metal lever handle, 30" slide bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 7-Mode, NSPO hand shower, 7-Mode, NPSO Showerhead, 2.0 gpm (7.6 L/min) flow restrictors, Tub spout not included, Components made from metal and nonmetal materials, plated in standard polished chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S5898TRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense 1.5/2.0 complaint, Lever handle meets ADA requirements. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower", "L3 - Less showerhead and hand shower", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "BBZ - Brushed Bronze finish", "TC - Test Cap Trim".

# Dimensions

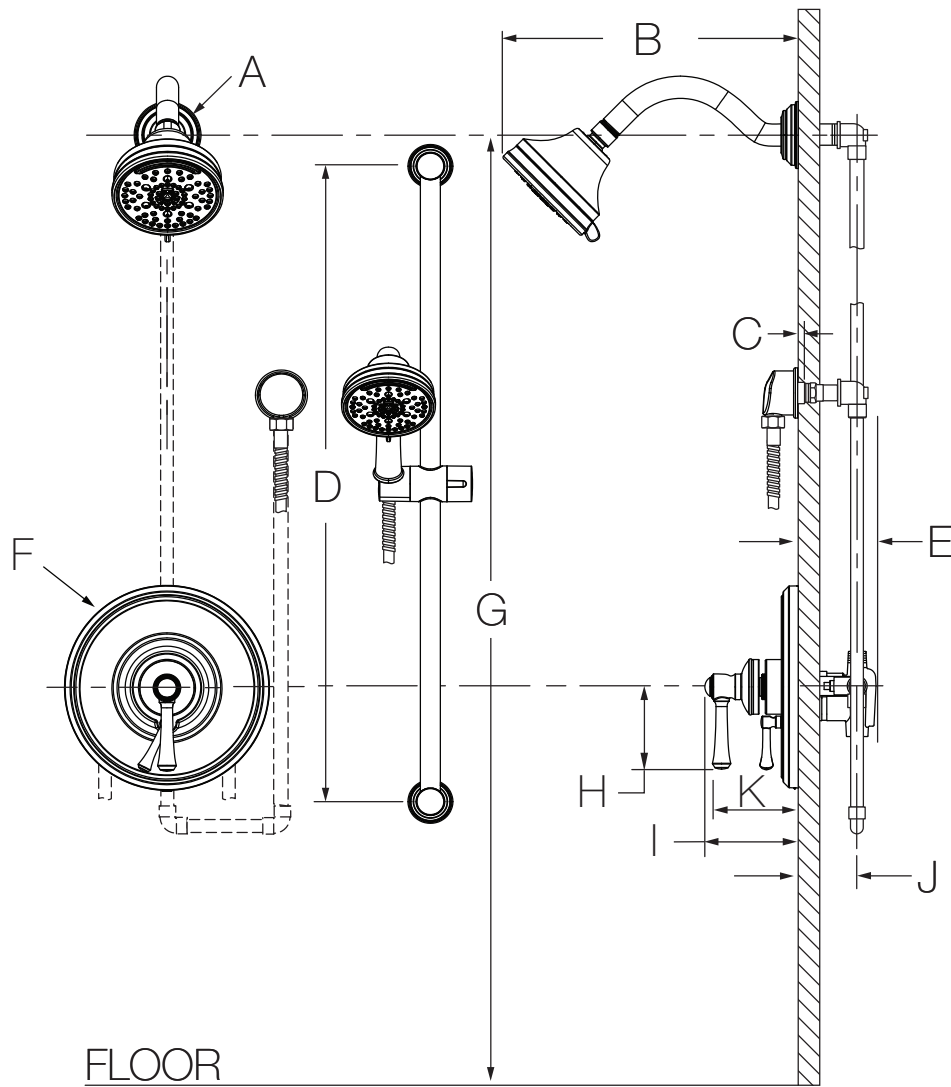

Measurements	
A	Ø 2-3/8", 62 mm
B	10-13/16", 275 mm
C	Male 1/2" IPS fitting must be recessed 1/4" (6 mm) from finished wall
D	28-9/16", 725 mm
E	3-1/2", 89 mm
F	Ø 7-1/2", 191 mm
G	Ref. 77", 1956 mm
H	3-1/16", 77 mm
I	3-3/8", 85 mm
J	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
K	3-1/16", 78 mm

## Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.