

# Location:



## S-9603-PLR, S-9603-PLR-TRM, S9603PLR, S9603PLRTRM Hand Shower System or Trim Specification Submittal

### Feature Highlights

- Origins Hand Shower System or Trim
- Requires Temptrol® Pressure Balancing Shower Valve (included with S-9603-PLR)
- Adjustable stop screw to limit handle turn (included with S-9603-PLR)
- Integral volume control
- Metal lever handle
- ADA 36" grab bar for hand shower
- Dual checks for backflow protection
- 60" flexible metal hose
- ADA 1 mode hand shower with non-positive shut-off
- Showerhead not included
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9603PLRTRMTC)
- For optional in-line vacuum breaker order p/n EF-109

### Model Numbers

- S-9603-PLR**  
Hand Shower System with integral volume control & Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- S9603PLR**  
Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- S-9603-PLR-TRM**  
Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- S9603PLRTRM**  
Hand Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

#### Note:

- To create trim sku, follow the format:  
Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard) -> TRM -> TC (If applicable)
- To create valve & trim sku, follow the format:  
Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard)
- For B and REV modifications, contact customer service for your sku

### Options/Modifications

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- L2** Less hand shower ( wand only)
- L5** Less hand shower system ( less bar, hose, wand & elbow)
- L7** Less handle
- TC** Test Cap Trim
- CHKS** Integral check stops
- VP** Vandal resistant escutcheon screws in place of standard screws
- STN** Satin Nickel finish
- B** Brass escutcheon (chrome only)
- X** Integral service stops - allows water shut-off at valve for service

### Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (S-9603-PLR only)
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)



### Warranty


- Limited Lifetime** - to the original end purchaser in consumer/residential installations.
- 10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### Architectural/ Engineering Specification

Symmons Origins \_\_\_\_\_ With Origins Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Shower Valve (included with S-9603-PLR), Adjustable stop screw to limit handle turn (included with S-9603-PLR), Integral volume control, Metal lever handle, ADA a" grab bar for hand shower, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower with non-positive shut-off, Showerhead not included, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9603PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) , complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower ( wand only)", "L5 - Less hand shower system ( less bar, hose, wand & elbow)", "L7 - Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stops", and "TC - Test Cap Trim".

## Dimensions

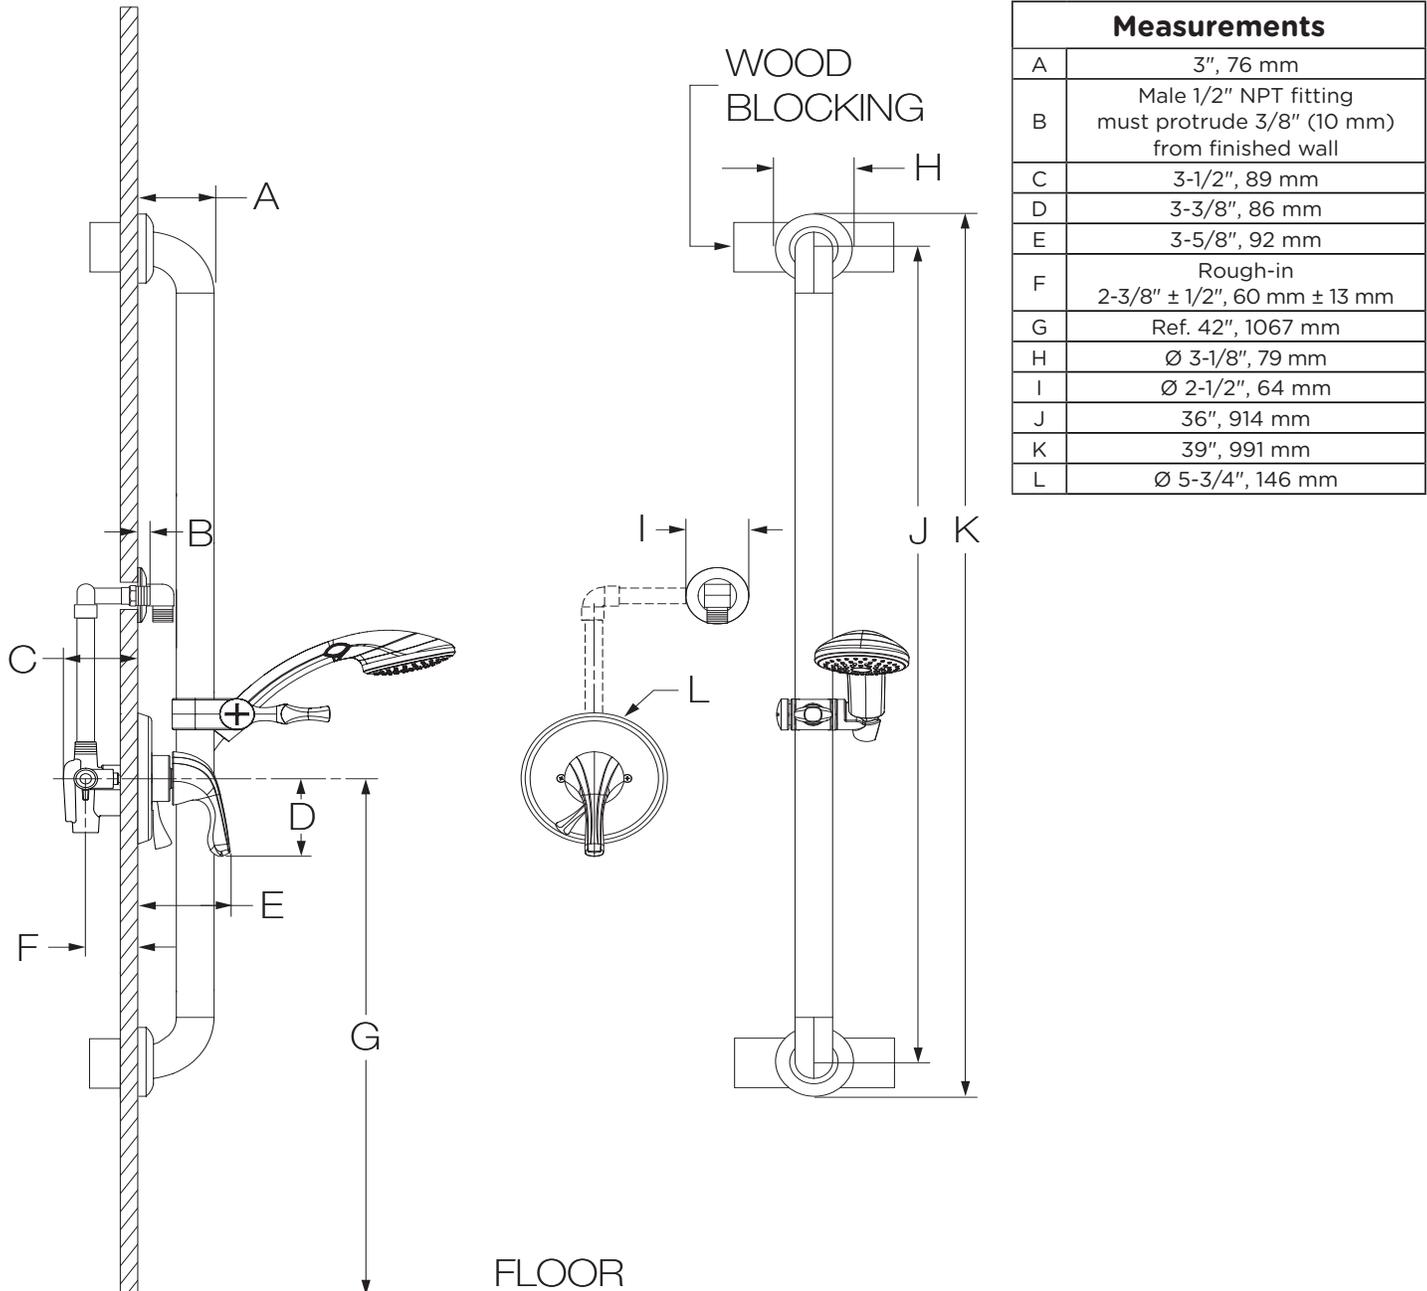

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.