

Location:



## Tub-Shower & Hand Shower System 5306 Specification Submittal



### Feature Highlights

- Symmons Tub-Shower & Hand Shower System with lever handles
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Separate triple outlet diverter valve with lever handle
- Showerhead #532SH, single mode, 5-3/4 inch diameter
- Showerhead mounting bracket and flange
- Wall/hand shower #532HS, two modes with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Standard flow rate is 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictor available*
- Tub spout, brass, #T-671
- Polished chrome finish (standard)

### Model Numbers

- 5306  
Tub/Shower/Hand Shower System with Symmons Temptrol mixing valve p/n 46-2-BODY
- 5306-TRM  
Trim only, valve must be ordered separately
- 46-2-BODY  
Symmons Temptrol mixing valve without trim
- 46-2X-BODY  
Symmons Temptrol mixing valve without trim. Valve includes integral service stops
- 3DIV-BODY  
Symmons triple outlet diverter valve without trim

### Finish Options / Modifications

*Append appropriate -suffix to model number*


- STN Satin nickel
- BLK Polished graphite
  - Polished chrome (standard finish)

### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

### Options / Modifications

*Append appropriate -suffix to model number*


- CG** -1.5 1.5 gpm (5.7 L/min) flow restrictor
- 2.0 2.0 gpm (7.6 L/min) flow restrictor
- 72 72" hose in place of 60" hose
- 532HSB 30" slide bar in place of standard wall cradle
- ADACHS ADA hand shower wand (chrome)
- ADAHS ADA hand shower wand (white)
- H321-V 1 mode hand shower unit with slide bar in place of standard hand shower unit
- H323-V 3 mode hand shower unit with slide bar in place of standard hand shower unit
- H323-V-48 3 mode hand shower unit with 48" slide bar in place of standard hand shower unit
- IPS 1/2" female IPS connections
-  -LP Loop handle
- L/HD Less showerhead
- L/HS Less hand shower
- CG** -NS Non-shared diverter valve for 5305 and 5306 series
- QD Quick-disconnect on hand spray units
- R 72" white vinyl hose in place of 60" metal hose
- REB Rebuild trim kit, includes TA-10 and TA-4
- REV Reverse coring, hot on right, cold on left, for back to back installations
- T724 24" slide bar/grab bar with ADA hand shower in place of standard hand shower unit
- T736 36" slide bar/grab bar with ADA hand shower in place of standard hand shower unit
- T748 48" slide bar/grab bar with ADA hand shower in place of standard hand shower unit
- VB Elevated vacuum breaker
- VP Vandal resistant escutcheon screws in place of standard screws
- X Integral service stops - allows water shutoff at valve for service
- X-CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve

### Standards / Certifications

ASME A112.18.1/CSA B125.1



# Dimensions Museo Tub-Shower & Hand Shower System, 5306

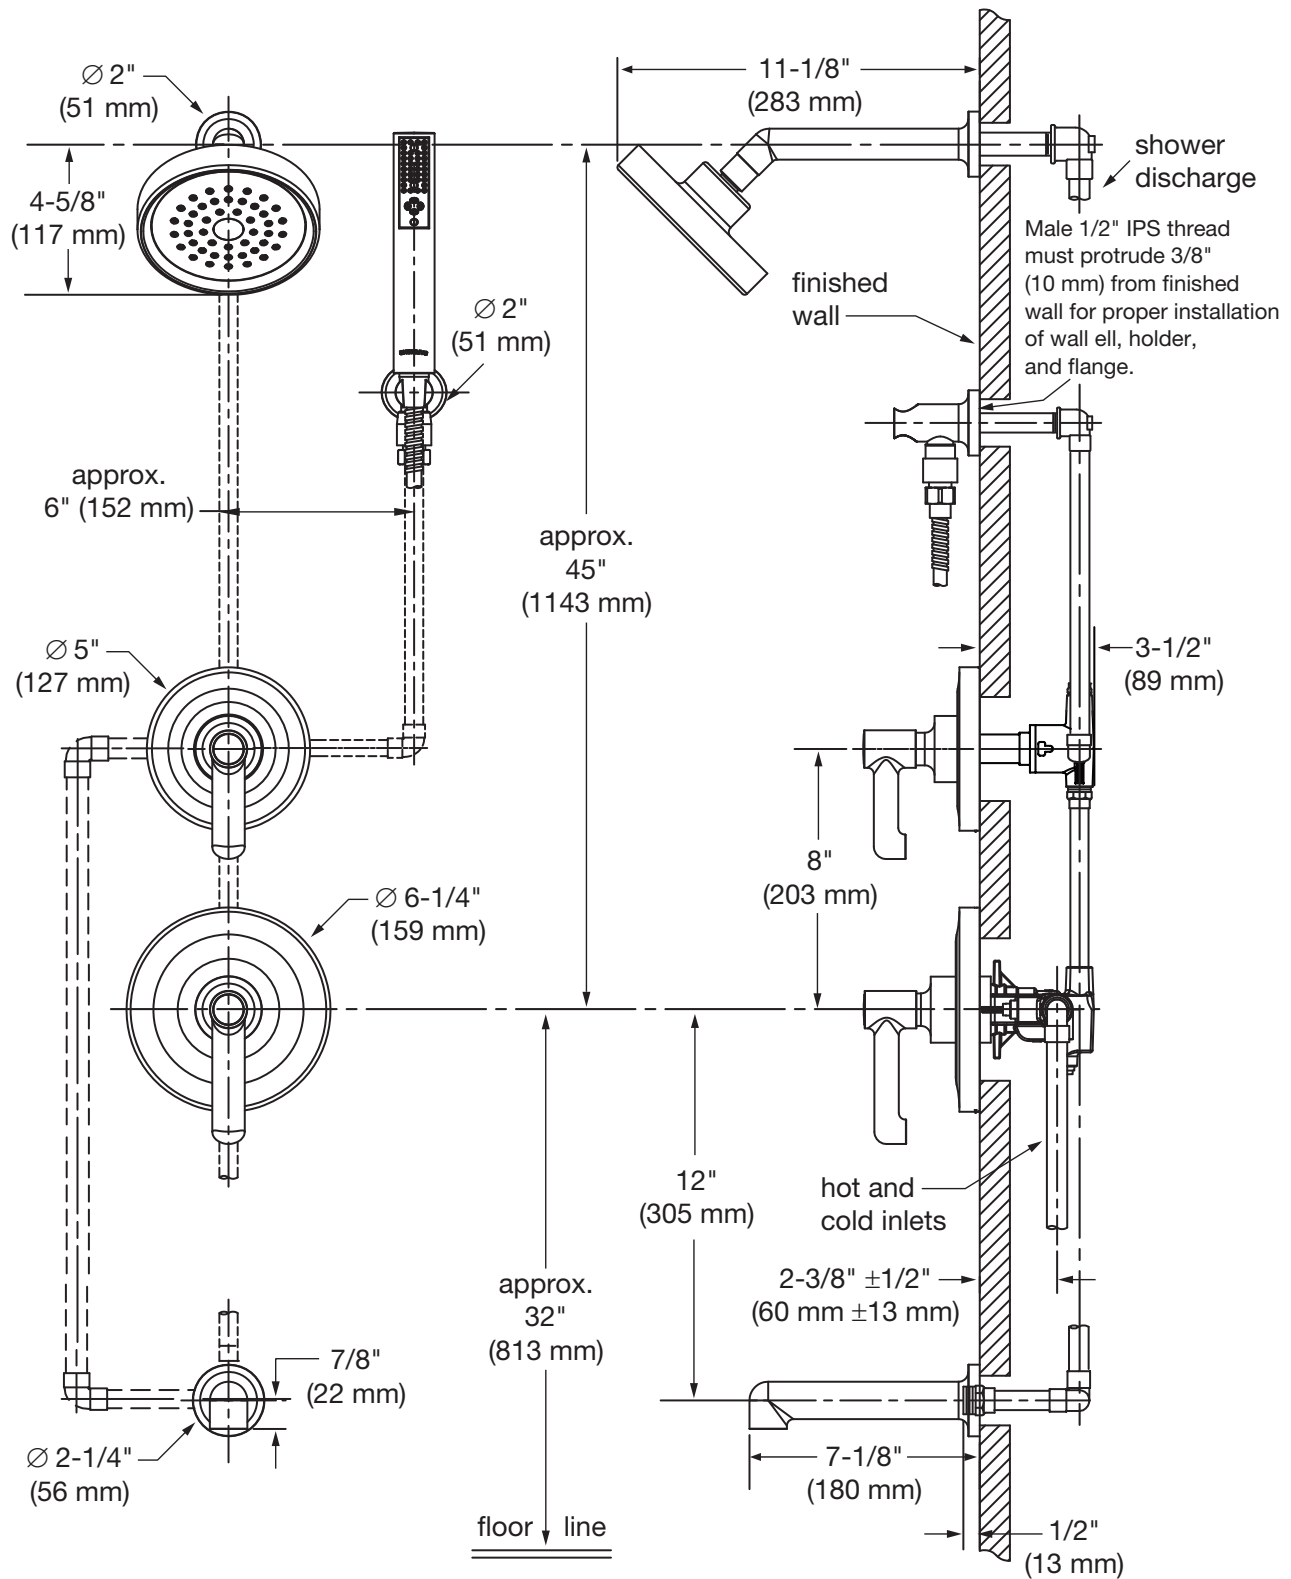

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 Phone: (800) 796-6667 ■ Fax: (800) 961-9621  
 symmons.com ■ gethelp@symmons.com

Copyright © 2017 Symmons Industries, Inc. ■ ZV-846 REV B ■ 022217

**SYMMONS**<sup>®</sup>  
 the smart choice™