

SLS0488 Single Handle Lavatory Faucet Installation Guide

Feature Highlights

Single Handle Lavatory Faucet shall include single hole mount configuration, ceramic cartridge, braided hose connections, metal drain assembly and 1.0 gpm (3.8 L/min) aerator. Faucet shall be metal construction, plated in standard polished chrome finish.

Model Numbers

- SLS0488
Single Handle Lavatory Faucet (1.0 gpm - 3.8 L/min)

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Options/Modifications

- **STN** Satin Nickel finish


Note: Append appropriate suffix to model number.

Compliance

- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372
- WaterSense 1.0 gpm (3.8 L/min)



Dimensions

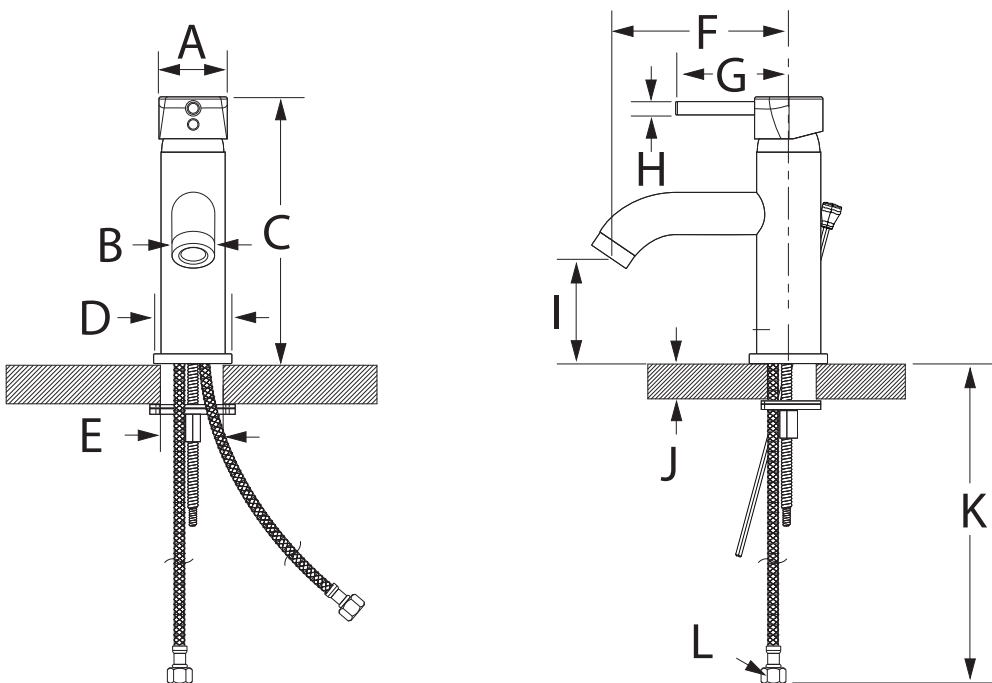


Measurements

A	Ø 1-3/4", 44 mm
B	1-3/16", 30 mm
C	7-3/8", 187 mm
D	Ø 2-1/4", 57 mm
E	Hole Size: Min. Ø 1-1/4", 32 mm Max. Ø 1-3/4", 44 mm
F	4-15/16", 125 mm
G	3-1/8", 79 mm
H	Ø 3/8", 10 mm
I	2-15/16", 75 mm
J	Deck Thickness Ref. Max. 1-1/4", 32 mm
K	1-7/8", 47 mm
L	14-1/2", 368 mm
M	3/8" compression fitting

Note: Dimensions subject to change without notice.



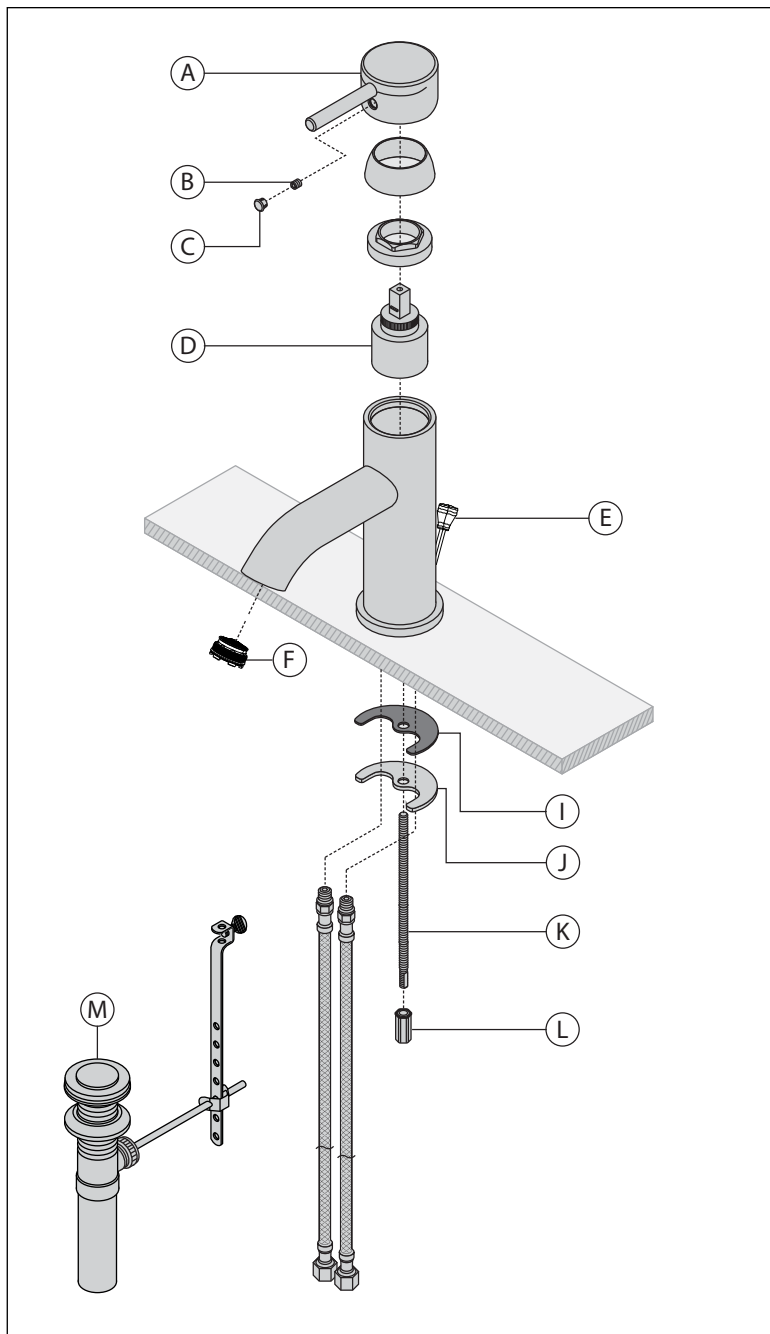


Parts Breakdown



Replacement Parts

Item	Description	Part Number
A	Handle	RL-043
B	Set Screw	
C	Plug Button	
D	Cartridge	RL-236
E	Lift Rod	RL-060
F	Aerator	FLR-110-1.0 (1.0 gpm)
I	Rubber Washer	RL-062
J	Metal Washer	
K	Mounting Rod	
L	Mounting Nut	
M	Metal Drain Assembly	RL-154LR

Tools Required for Installation

Adjustable Wrench	
Allen Wrench: Handle (2.5 mm)	
Plumber Putty	
Plumber Tape	
Silicone	

Installation Notes:

- 1) Apply a bead of clear silicone around the perimeter of all faucet trim installed to deck surface.
- 2) Apply plumber tape to threaded connections as necessary. DO NOT use plumber tape on fittings with face seal washers or o-rings.
- 3) DO NOT OVERTIGHTEN fittings with face seal washers or o-rings.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.