

Location:



SYMMONS® Ballina™

Shower System with Hand Shower 5205

Specification Submittal

Feature Highlights

- Symmons shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Separate dual outlet lever diverter valve
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Shower head with mounting bracket
- Standard flow rate 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available 
- Polished chrome finish


Model Numbers

- ☐ 5205..... Shower System with Symmons Temptrol® pressure balancing mixing valve p/n 4000-BODY and dual outlet diverter p/n 4-458E-BODY
- ☐ 5205-TRM..... Trim only, valve and diverter must be ordered separately
- ☐ 4000-BODY..... Symmons Temptrol® pressure balancing mixing valve without trim
- ☐ 4000-X-BODY... Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.
- ☐ 4-458E-BODY... Symmons dual outlet diverter valve without trim

Finish Options / Modifications

Append appropriate -suffix to model number.

- ☐ -STN Satin nickel
- ☐ -BBZ Brushed Bronze
- Polished chrome (standard finish)

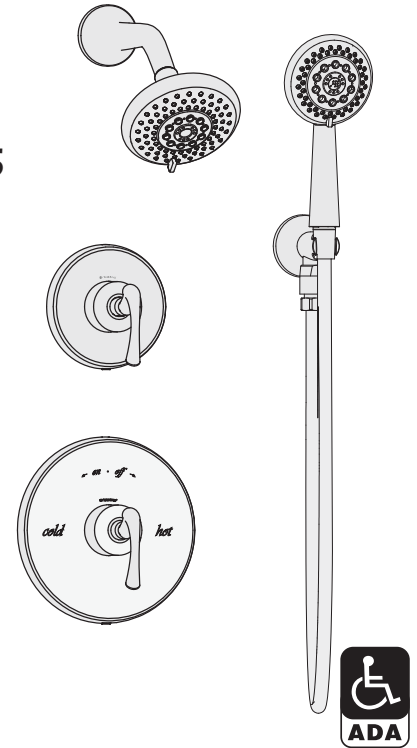

Options / Modifications

Append appropriate -suffix to model number.

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ☐ -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 5205.)
- ☐  -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐  1.5 1.5 (5.7 L/min) Flow rate restrictor

Standards / Certifications


ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Ballina Shower System with Hand Shower, 5205*

Male 1/2" I.P.S. thread must protrude 1/2" (13mm) from finished wall for proper installation of wall ell and cradle.

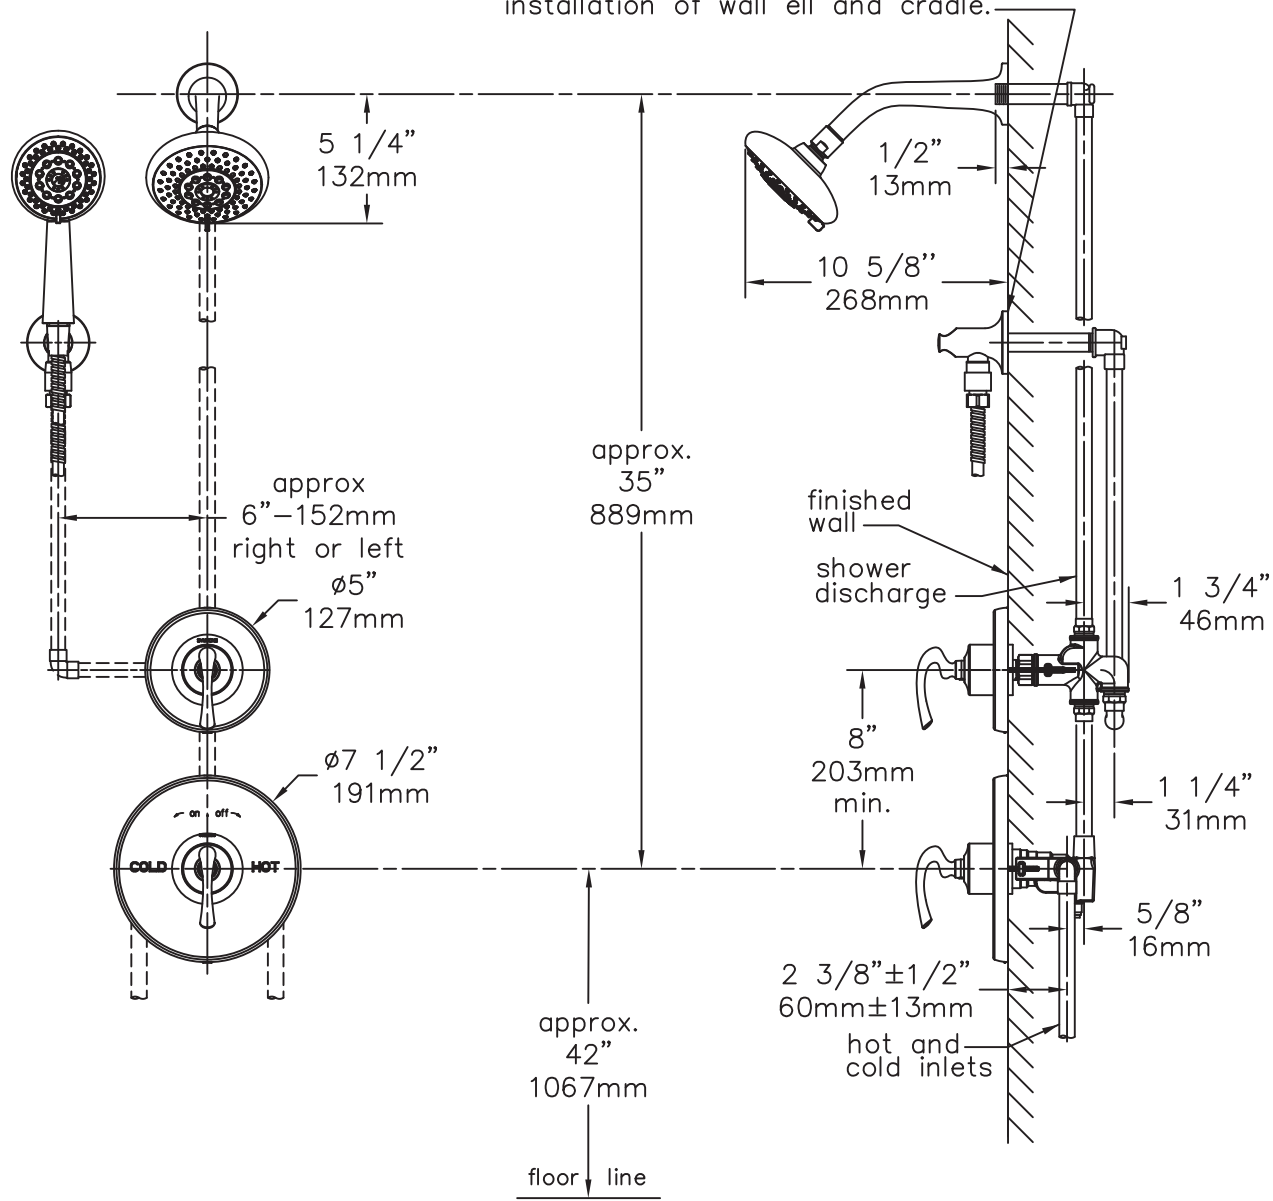

Note: Dimensions subject to change without notice.