





CDSLW0373-12-CYL-1.5 Widespread Lavatory Faucet Installation Guide

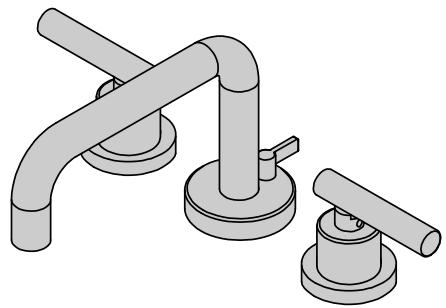

Model Number	Specification
<input type="checkbox"/> CDSLW0373-12-CYL-1.5 Widespread Lavatory Faucet	Widespread lavatory faucet includes hot and cold ceramic cartridges, lift rod, pop up drain assembly and 1.5 gpm (5.7 L/min) aerator. Components made from metal and nonmetallic materials plated in standard polished chrome.
Warranty	Limited Lifetime - to the original end purchaser in consumer installations. 5 Years - for commercial installations.
Refer to www.symmons.com/warranty for complete warranty information.	


Dimensions

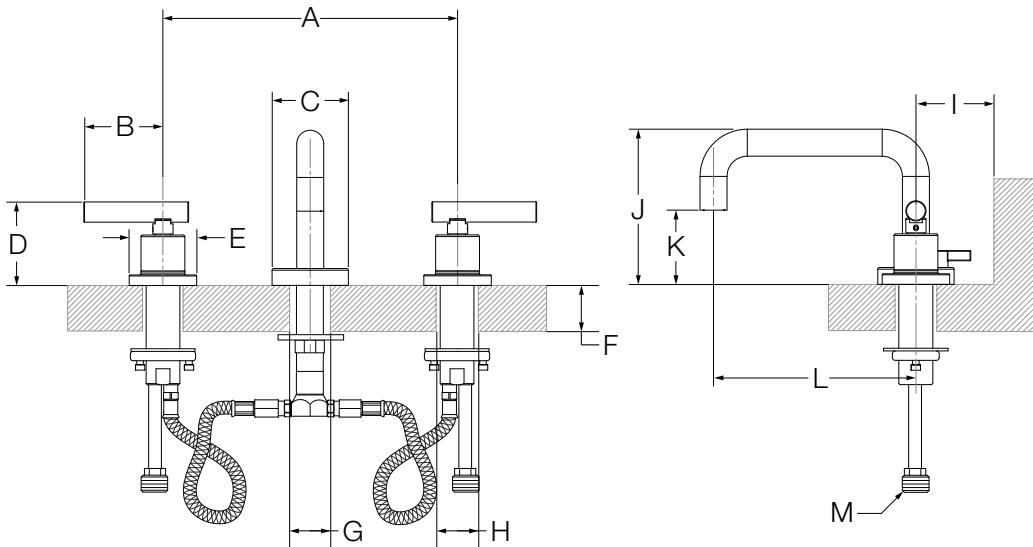

Measurements	
A	8", 203 mm
B	(2x) 2 3/8", 60 mm
C	Ø 2 1/4", 57 mm
D	(2x) 2 1/2", 64 mm
E	(2x) Ø 2", 51 mm
F	Deck Thickness Ref. 1 3/8", 35 mm
G	Max. Ø 1 3/4", 44 mm
H	(2x) Hole Size Max. Ø 1 1/2", 38 mm
I	Min. 2", 51 mm
J	4 5/8", 117 mm
K	2 3/16", 56 mm
L	6", 152 mm
M	(2x) 1/2"-14 NPSM

Note: Dimensions subject to change without notice.

Parts Breakdown

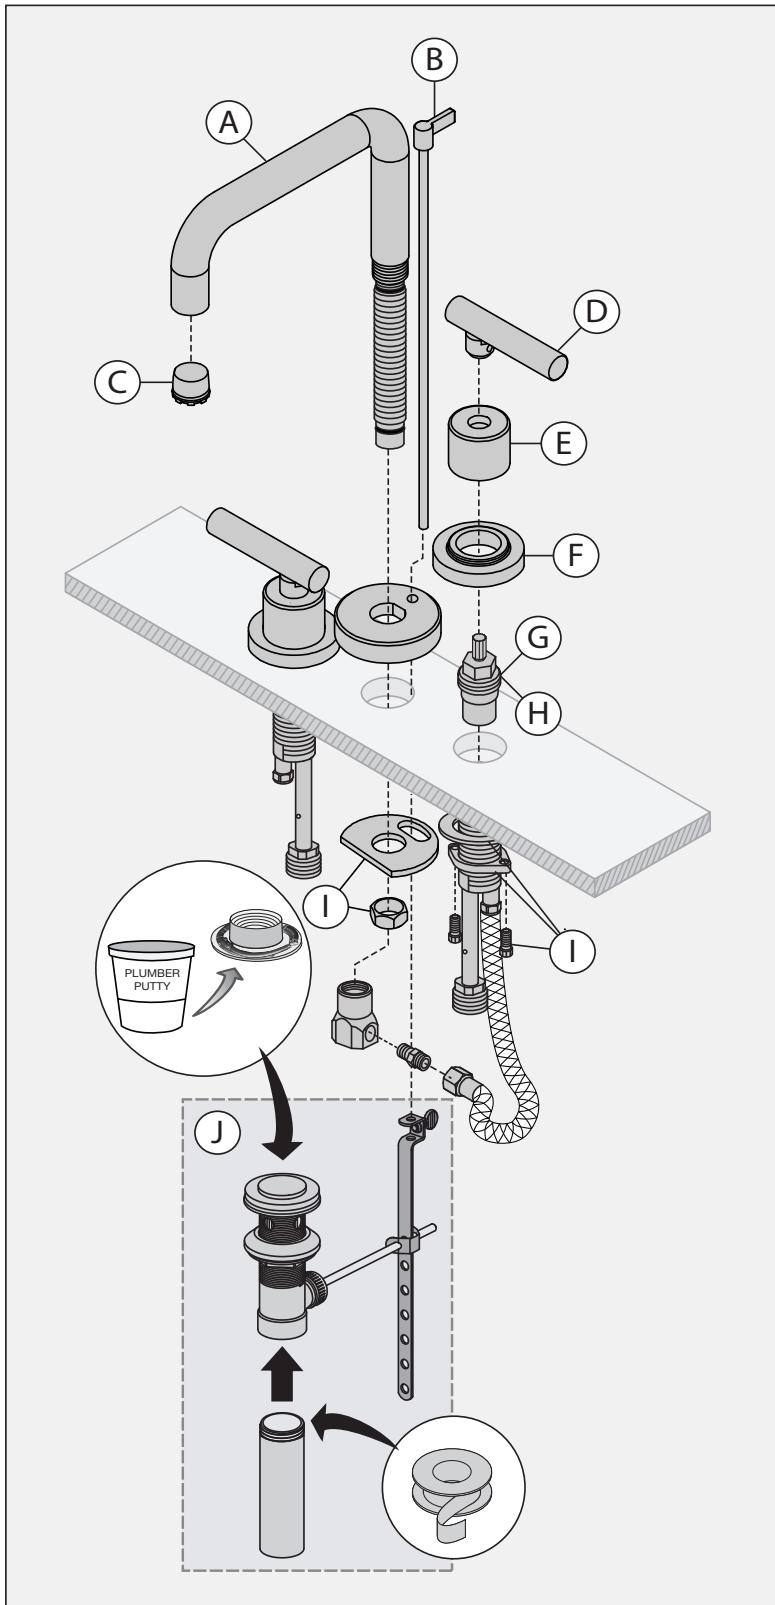

Replacement Parts		
Item	Description	Part Number
A	Spout	LN-02479
B	Lift Rod	LN-02478
C	Aerator	FLR-102-1.5
D E F	Handle Assembly	WSF-CYL-KIT
G	Hot Cartridge	KN-114
H	Cold Cartridge	KN-113
I	Mounting Hardware Kit	LN-02565
J	Pop Up Drain Assembly	RL-154LR

Tools Required for Installation

Adjustable Wrench	
Allen Wrench (3/32")	
Phillips Head Screwdriver	
Plumber Putty	
Plumber Tape	

Note: Apply plumber tape to all threaded connections.